




➡ Push On "T" Type Flexible Joint (Tyton) Socket & Spigot Pipe  
Class K9 / K12

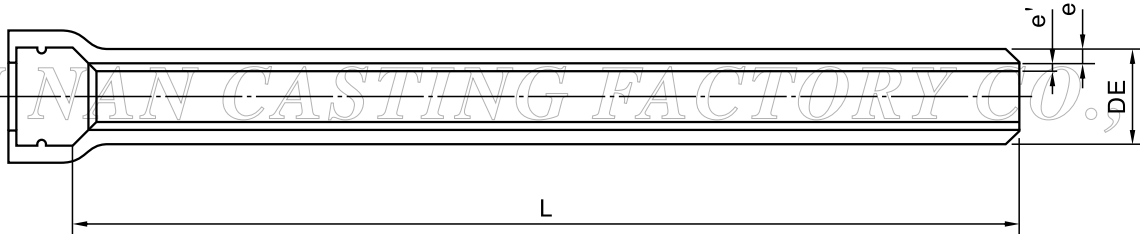

Unit: mm

Nominal size	Thickness				Outside diameter	Nominal laying length	Mass of Iron (Kg)	
	Unlined pipe		Cement lining				K9	K12
	e		e'					
DN	K9	K12	EN	ISO	DE	L		
80	6.0	7.0	4	3	98	4000	52.0	60.0
100	6.0	7.2	4	3	118	6000	95.0	111.0
150	6.0	7.8	4	3	170	6000	144.0	175.0
200	6.3	8.4	4	3	222	6000	194.0	249.0
250	6.8	9.0	4	3	274	6000	255.0	331.0
300	7.2	9.6	4	3	326	6000	323.0	422.0
350	7.7	10.2	5	5	378	6000	403.0	522.0
400	8.1	10.8	5	5	429	6000	482.0	629.0
450	8.6	11.4	5	5	480	6000	574.0	745.0
500	9.0	12.0	5	5	532	6000	669.0	872.0
600	9.9	13.2	5	5	635	6000	883.0	1150.0
700	10.8	14.4	6	6	738	6000	1126.0	1464.0
800	11.7	15.6	6	6	842	6000	1394.0	1816.0
900	12.6	16.8	6	6	945	6000	1691.0	2202.0
1000	13.5	18.0	6	6	1048	6000	2017.0	2625.0
1100	14.4	19.2	6	6	1152	6000	2372.0	3086.0
1200	15.3	20.4	6	6	1255	6000	2758.0	3585.0
1400	17.1	22.8	9	9	1462	6000	3563.0	4640.0
1500	18.0	24.0	9	9	1565	6000	4015.0	5229.0
1600	18.9	25.2	9	9	1668	6000	4517.0	5877.0
1800	20.7	27.6	9	9	1875	6000	5591.0	7266.0
2000	22.5	30.0	9	9	2082	6000	6784.0	8807.0