


➡ K型延性鑄鐵管

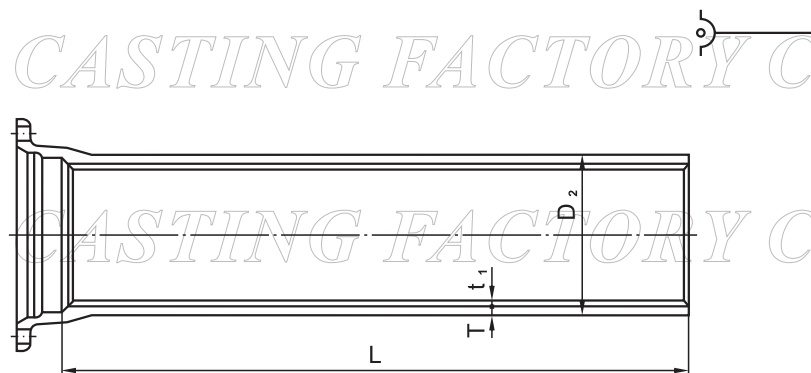


標稱 管徑	管 厚								內襯 厚度	外徑	各 部 尺 度					
D	T								t ₁	D ₂	D ₃	D ₄	D ₅	E	P	K
	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5								
100	7.5	-	-	-	6.0	-	-	-	4	118.0	121.5	186	232	23	80	19
150	7.5	-	-	-	6.0	-	-	-	4	169.0	172.5	241	287	23	80	20
200	7.5	-	-	-	6.0	-	-	-	4	220.0	223.5	292	338	23	80	21
250	7.5	-	-	-	6.0	-	-	-	4	271.6	275.1	348	394	23	80	22
300	7.5	-	-	-	6.5	-	-	-	6	322.8	326.8	399	445	23	110	23
350	7.5	-	-	-	6.5	-	-	-	6	374.0	378.0	458	504	23	110	24
400	8.5	-	7.5	-	7.0	-	-	-	6	425.6	429.6	512	558	23	110	25
450	9.0	-	8.0	-	7.5	-	-	-	6	476.8	480.8	567	613	23	110	26
500	9.5	-	8.5	-	8.0	-	-	-	6	528.0	532.0	618	664	23	110	27
600	11.0	-	10.0	-	9.0	-	8.5	-	6	630.8	634.8	725	771	23	110	28
700	12.0	-	11.0	-	10.0	-	9.0	-	8	733.0	738.0	839	893	27	120	29
800	13.5	-	12.0	-	11.0	-	10.0	-	8	836.0	841.0	942	996	27	120	30
900	15.0	-	13.0	-	12.0	-	11.0	-	8	939.0	944.0	1052	1118	33	120	31
1000	16.5	-	14.5	-	13.0	-	12.0	-	10	1041.0	1047.0	1160	1226	33	130	32
1100	18.0	-	15.5	-	14.0	-	13.0	-	10	1144.0	1150.0	1266	1332	33	130	34
1200	19.5	-	17.0	-	15.0	-	13.5	-	10	1246.0	1253.0	1372	1438	33	130	36
1350	21.5	-	18.5	-	16.5	-	15.0	-	12	1400.0	1407.0	1536	1602	33	130	38
1500	23.5	-	20.5	-	18.0	-	16.5	-	12	1554.0	1561.0	1700	1766	33	130	40
1600	25.0	23.5	22.0	20.5	19.0	18.0	17.5	16.0	15	1650.0	1658.0	1790	1856	33	160	40
1650	25.5	24.0	22.5	21.0	19.5	18.5	18.0	16.5	15	1701.0	1709.0	1844	1910	33	165	42
1800	28.0	26.0	24.0	22.5	21.0	20.0	19.5	18.0	15	1848.0	1856.0	1996	2062	33	170	44
2000	30.5	28.5	26.5	25.0	23.5	22.0	21.0	19.5	15	2061.0	2069.0	2216	2282	33	180	46
2100	32.0	30.0	28.0	26.0	24.5	23.0	22.0	20.5	15	2164.0	2172.0	2322	2388	33	185	48
2200	33.5	31.0	29.0	27.0	25.5	24.0	23.0	21.5	15	2280.0	2288.0	2441	2507	33	190	49
2400	36.5	34.0	31.5	29.5	27.5	26.0	25.0	23.0	15	2458.0	2466.0	2626	2692	33	200	52
2600	39.5	36.5	34.0	31.5	29.5	28.0	27.0	27.0	15	2684.0	2692.0	2862	2928	33	230	55

備考：1. 承口凸出部之質量為修整至有效數字者，故其總合與1支之總質量未必一致。

2. 承口內面之形狀，可依虛線之形狀。

3. 表列以外之有效長度由買賣雙方協議之。

➡ K型延性鑄鐵管

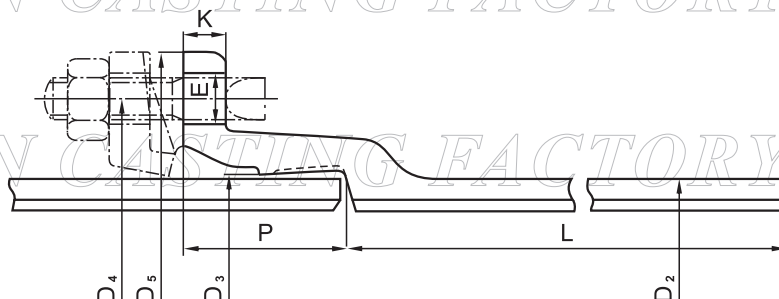

■ 接合部詳細

單位：mm

螺栓數量	有效長度	質 量 (Kg)										標稱管徑
		承 口 凸 出 部	1 支 總 質 量									
	D1		D1.5	D2	D2.5	D3	D3.5	D4	D4.5	內襯	D	
4	6000	6.68	118.4	-	-	-	97.2	-	-	-	17.9	100
6	6000	9.64	173.0	-	-	-	141.0	-	-	-	27.1	150
6	6000	12.50	227.0	-	-	-	186.0	-	-	-	36.4	200
8	6000	15.60	283.0	-	-	-	230.0	-	-	-	45.7	250
8	6000	24.00	343.0	-	-	-	301.0	-	-	-	81.9	300
10	6000	28.90	399.0	-	-	-	351.0	-	-	-	95.8	350
12	6000	34.50	512.0	-	457	-	429.0	-	-	-	109.0	400
12	6000	39.50	607.0	-	545	-	514.0	-	-	-	123.0	450
14	6000	45.70	710.0	-	641	-	606.0	-	-	-	137.0	500
14	6000	57.50	976.0	-	894	-	812.0	-	770	-	164.0	600
16	6000	75.00	1240.0	-	1150	-	1050.0	-	953	-	254.0	700
20	6000	90.70	1590.0	-	1420	-	1310.0	-	1200	-	290.0	800
20	6000	112.00	1980.0	-	1730	-	1610.0	-	1490	-	326.0	900
20	6000	140.00	2420.0	-	2150	-	1940.0	-	1800	-	452.0	1000
24	6000	163.00	2890.0	-	2520	-	2300.0	-	2140	-	497.0	1100
28	6000	187.00	3410.0	-	3000	-	2680.0	-	2430	-	542.0	1200
28	6000	232.00	4230.0	-	3680	-	3310.0	-	3030	-	730.0	1350
28	6000	280.00	5130.0	-	4520	-	4010.0	-	3700	-	812.0	1500
30	5000	326.00	4890.0	4620	4350	4080	3810.0	3630	3530	3260	896.0	1600
	6000		5800.0	5480	5150	4830	4500.0	4290	4180	3850	1075.0	
30	5000	360.00	5160.0	4880	4600	4320	4040.0	3860	3760	3480	925.0	1650
	6000		6120.0	5780	5450	5115	4780.0	4555	4440	4105	1110.0	
34	5000	427.00	6150.0	5750	5340	5040	4740.0	4530	4430	4130	1000.0	1800
	6000		7295.0	6810	6325	5960	5600.0	5355	5230	4865	1205.0	
36	5000	534.00	7490.0	7040	6590	6250	5910.0	5570	5350	5010	1120.0	2000
	6000		8880.0	8340	7800	7395	6990.0	6580	6310	5900	1350.0	
38	5000	597.00	8260.0	7790	7310	6840	6480.0	6130	5890	5530	1180.0	2100
	6000		9790.0	9225	8660	8090	7660.0	7230	6950	6520	1415.0	
40	4000	659.00	7420.0	6920	6520	6120	5820.0	5520	5320	5020	994.0	2200
	5000		9110.0	8490	7990	7490	7120.0	6740	6490	6110	1240.0	
	6000		10800.0	10055	9455	8860	8410.0	7955	7655	7200	1490.0	
44	4000	803.00	8740.0	8210	7670	7240	6810.0	6480	6270	5840	1070.0	2400
	5000		10730.0	10060	9390	8850	8310.0	7905	7635	7090	1340.0	
	6000		12715.0	11910	11105	10460	9810.0	9325	9000	8350	1610.0	
48	4000	1001.00	10390.0	9680	9100	8510	8040.0	7680	7450	6970	1170.0	2600
	5000		12730.0	11855	11120	10385	9795.0	9350	9060	8470	1465.0	
	6000		15080.0	14025	13145	12260	11555.0	11025	10670	9960	1760.0	