




三凸緣丁字管

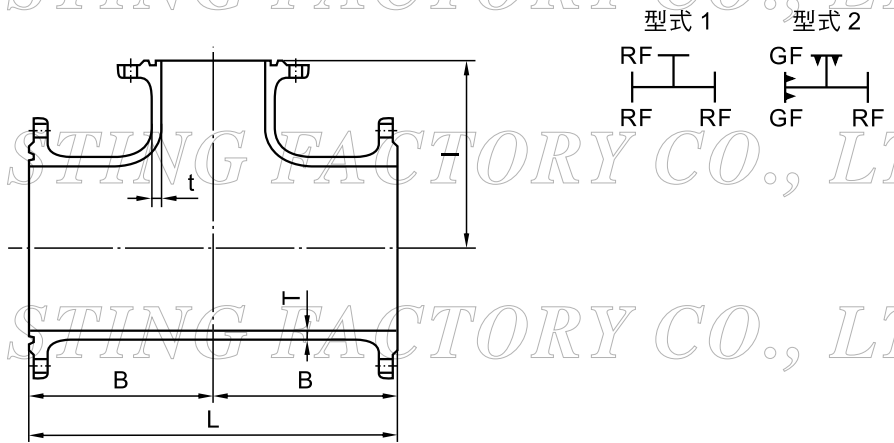

單位：mm

標稱管徑		管 厚		各 部 尺 度			質 量 (Kg)				
D	d	T	t	B	I	L	型 式 1		型 式 2		
							7.5K	7.5K	10K	16K	20K
75	75	8.5	8.5	160	140	320	17.9	17.7	13.2	15.3	16.2
100	75	8.5	8.5	180	160	360	21.9	21.6	16.5	19.7	20.7
	100	8.5	8.5	180	160	360	23.1	22.8	17.4	21.1	22.1
150	75	9.0	8.5	190	190	380	30.0	29.7	26.9	31.9	34.6
	100	9.0	8.5	190	190	380	31.2	30.8	27.8	33.3	36.0
	150	9.0	9.0	190	190	380	33.8	33.4	31.5	38.0	41.5
200	100	11.0	10.0	200	230	400	43.8	43.4	39.0	46.5	49.5
	150	11.0	11.0	250	250	500	52.9	52.4	49.2	57.6	61.4
	200	11.0	11.0	250	250	500	56.1	55.6	51.7	61.1	65.1
250	100	12.0	10.0	230	250	460	62.0	61.4	58.2	71.0	77.5
	150	12.0	11.0	230	250	460	64.9	64.3	62.1	75.9	83.2
	250	12.0	12.0	280	260	560	80.4	79.6	77.4	94.8	104.0
300	100	12.5	10.0	240	280	480	77.1	76.5	69.1	87.0	94.1
	150	12.5	11.0	240	280	480	79.9	79.3	73.1	91.8	99.8
	200	12.5	11.0	330	300	660	99.2	98.6	91.7	111.0	120.0
	300	12.5	12.5	330	300	660	109.0	108.0	100.0	125.0	135.0
350	250	13.0	12.0	360	340	720	133.0	132.0	120.0	151.0	162.0
	350	13.0	13.0	360	340	720	144.0	143.0	127.0	165.0	177.0
400	300	14.0	12.5	410	390	820	175.0	174.0	166.0	208.0	225.0
	400	14.0	14.0	410	390	820	188.0	187.0	180.0	230.0	250.0
450	300	14.5	12.5	440	420	880	214.0	213.0	203.0	256.0	276.0
	450	14.5	14.5	440	420	880	237.0	235.0	225.0	292.0	317.0
500	300	15.0	12.5	480	460	960	256.0	255.0	244.0	309.0	330.0
	350	15.0	13.0	480	460	960	262.0	261.0	248.0	317.0	339.0
	500	15.0	15.0	480	460	960	285.0	284.0	273.0	357.0	384.0
600	400	16.0	14.0	550	530	1100	360.0	359.0	357.0	445.0	474.0
	500	16.0	15.0	550	530	1100	376.0	375.0	371.0	471.0	503.0
	600	16.0	16.0	550	530	1100	391.0	389.0	390.0	498.0	531.0
700	400	17.0	14.0	620	600	1240	479.0	478.0	480.0	589.0	685.0
	500	17.0	15.0	620	600	1240	495.0	493.0	494.0	614.0	713.0
	600	17.0	16.0	620	600	1240	508.0	507.0	511.0	639.0	740.0
	700	17.0	17.0	620	600	1240	529.0	527.0	534.0	672.0	806.0
800	500	18.0	15.0	690	670	1380	645.0	644.0	643.0	800.0	971.0
	600	18.0	16.0	690	670	1380	658.0	657.0	660.0	825.0	998.0
	700	18.0	17.0	690	670	1380	677.0	676.0	681.0	856.0	1060.0
	800	18.0	18.0	690	670	1380	705.0	703.0	708.0	901.0	1140.0
900	600	19.0	16.0	600	690	1200	701.0	700.0	690.0	877.0	1090.0
	700	19.0	17.0	770	750	1540	867.0	865.0	857.0	1050.0	1300.0
	800	19.0	18.0	770	750	1540	893.0	891.0	883.0	1100.0	1380.0
	900	19.0	19.0	770	750	1540	926.0	924.0	909.0	1140.0	1440.0
1000	600	20.0	16.0	680	770	1360	889.0	885.0	883.0	1130.0	-
	800	20.0	18.0	840	820	1680	1090.0	1090.0	1090.0	1360.0	-
	1000	20.0	20.0	840	820	1680	1150.0	1150.0	1140.0	1460.0	-
1100	600	21.0	16.0	650	800	1300	984.0	979.0	984.0	1250.0	-
	800	21.0	18.0	740	830	1480	1120.0	1120.0	1120.0	1420.0	-
	1100	21.0	21.0	910	890	1820	1420.0	1410.0	1420.0	1760.0	-
1200	600	22.0	17.0	680	860	1360	1160.0	1160.0	1180.0	1490.0	-
	900	22.0	19.0	810	910	1620	1390.0	1380.0	1400.0	1750.0	-
	1200	22.0	22.0	970	950	1940	1700.0	1690.0	1730.0	2130.0	-
1350	600	24.0	19.0	700	950	1400	1470.0	1460.0	1490.0	1870.0	-
	900	24.0	19.0	860	1000	1720	1760.0	1750.0	1770.0	2200.0	-
	*1350	24.0	24.0	1080	1050	2160	2400.0	2390.0	2430.0	2960.0	-
1500	600	26.0	21.0	730	1050	1460	1810.0	1810.0	1850.0	2310.0	-
	1000	26.0	21.0	920	1100	1840	2220.0	2210.0	2260.0	2790.0	-
	*1500	26.0	26.0	1180	1150	2360	3050.0	3050.0	3120.0	3750.0	-

備考：1. 標稱管徑欄有 * 符號之管，須附補強肋。
2. 附圖係表型式 2。