




● K型延性鑄鐵管件

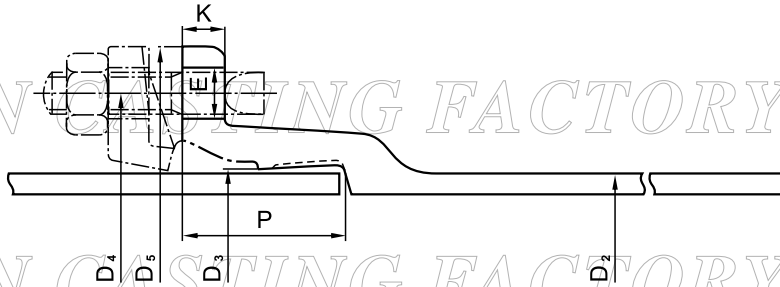

單位：mm

標稱管徑 D	外徑 D ₂	各 部 尺 寸						螺栓 數量	質量 (Kg) 承口凸出部
		D ₃	D ₄	D ₅	E	P	K		
75	93.0	96.5	159	197	19	80	18	4	5.06
100	118.0	121.5	186	232	23	80	19	4	6.56
150	169.0	172.5	241	287	23	80	20	6	9.45
200	220.0	223.5	292	338	23	80	21	6	12.10
250	271.6	275.1	348	394	23	80	22	8	15.10
300	322.8	326.8	399	445	23	110	23	8	23.60
350	374.0	378.0	458	504	23	110	24	10	28.20
400	425.6	429.6	512	558	23	110	25	12	33.80
450	476.8	480.8	567	613	23	110	26	12	40.20
500	528.0	532.0	618	664	23	110	27	14	46.20
600	630.8	634.8	725	771	23	110	28	14	57.90
700	733.0	738.0	839	893	27	120	29	16	76.00
800	836.0	841.0	942	996	27	120	30	20	92.00
900	939.0	944.0	1052	1118	33	120	31	20	113.00
1000	1041.0	1047.0	1160	1226	33	130	32	20	141.00
1100	1144.0	1150.0	1266	1332	33	130	34	24	166.00
1200	1246.0	1253.0	1372	1438	33	130	36	28	190.00
1350	1400.0	1407.0	1536	1602	33	130	38	28	234.00
1500	1554.0	1561.0	1700	1766	33	130	40	28	283.00
1600	1650.0	1658.0	1790	1856	33	160	40	30	329.00
1650	1701.0	1709.0	1844	1910	33	165	42	30	363.00
1800	1848.0	1856.0	1996	2062	33	170	44	34	429.00
2000	2061.0	2069.0	2216	2282	33	180	46	36	545.00
2100	2164.0	2172.0	2322	2388	33	185	48	38	605.00
2200	2280.0	2288.0	2441	2507	33	190	49	40	670.00
2400	2458.0	2466.0	2626	2692	33	200	52	44	812.00
2600	2684.0	2692.0	2862	2928	33	230	55	48	1041.00

備考：承口內面之形狀，可依虛線之形狀。