




● K型縮管

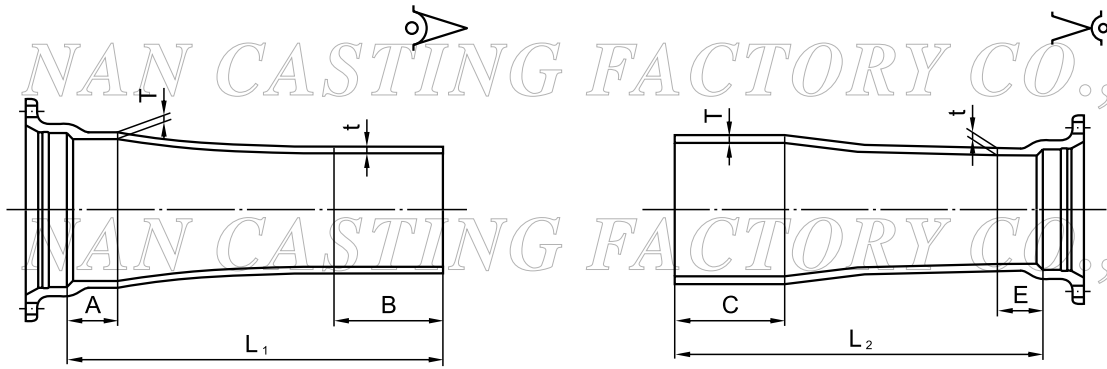

■ 承插式縮管

■ 插承式縮管

單位：mm

標稱管徑		管厚		各部尺度						質量 (Kg)	
D	d	T	t	A	B	C	E	L ₁	L ₂	承插	插承
100	75	8.5	8.5	50	200	200	50	550	550	16.2	15.4
150	100	9.0	8.5	55	200	200	50	555	550	22.9	21.6
200	100	11.0	10.0	60	200	200	50	560	550	30.5	28.5
250	150	11.0	11.0	60	200	200	55	560	555	36.1	35.0
	100	12.0	10.0	70	200	200	50	670	650	41.4	38.3
300	150	12.0	11.0	70	200	200	55	670	655	48.1	45.8
	200	12.0	11.0	70	200	200	60	670	660	53.8	52.7
350	100	12.5	10.0	80	200	200	50	680	650	55.0	44.7
	150	12.5	11.0	80	200	200	55	680	655	61.5	52.2
400	200	12.5	11.0	80	200	200	60	680	660	67.1	58.8
	250	12.5	12.0	80	200	200	70	680	670	75.2	68.0
450	150	13.0	11.0	80	200	200	55	680	655	71.0	59.2
	200	13.0	11.0	80	200	200	60	680	660	76.4	65.7
500	250	13.0	12.0	80	200	200	70	680	670	84.3	74.7
	300	13.0	12.5	80	200	200	80	680	680	91.7	89.3
550	150	14.0	11.0	90	200	220	55	790	775	90.8	77.7
	200	14.0	11.0	90	200	220	60	790	780	97.1	85.1
600	250	14.0	12.0	90	200	220	70	790	790	106.0	95.3
	300	14.0	12.5	90	200	220	80	790	800	115.0	111.0
650	350	14.0	13.0	90	220	220	80	810	800	126.0	123.0
	200	14.5	11.0	100	200	230	60	800	790	112.0	96.2
700	250	14.5	12.0	100	200	230	70	800	800	121.0	106.0
	300	14.5	12.5	100	200	230	80	800	810	129.0	122.0
750	350	14.5	13.0	100	220	230	80	820	810	140.0	133.0
	400	14.5	14.0	100	220	230	90	820	820	153.0	149.0
800	250	15.0	12.0	110	200	230	70	810	800	136.0	117.0
	300	15.0	12.5	110	200	230	80	810	810	144.0	132.0
850	350	15.0	13.0	110	220	230	80	830	810	155.0	143.0
	400	15.0	14.0	110	220	230	90	830	820	167.0	159.0
900	450	15.0	14.5	110	230	230	100	840	830	179.0	175.0
	300	16.0	12.5	120	200	230	80	820	810	177.0	157.0
950	350	16.0	13.0	120	220	230	80	840	810	187.0	167.0
	400	16.0	14.0	120	220	230	90	840	820	198.0	182.0
1000	450	16.0	14.5	120	230	230	100	850	830	210.0	197.0
	500	16.0	15.0	120	230	230	110	850	840	221.0	213.0
1050	400	17.0	14.0	130	220	240	90	1050	1030	274.0	245.0
	450	17.0	14.5	130	230	240	100	1060	1040	288.0	263.0
1100	500	17.0	15.0	130	230	240	110	1060	1050	301.0	281.0
	600	17.0	16.0	130	230	240	120	1060	1060	332.0	319.0
1150	450	18.0	14.5	140	230	240	100	1070	1040	336.0	297.0
	500	18.0	15.0	140	230	240	110	1070	1050	349.0	315.0
1200	600	18.0	16.0	140	230	240	120	1070	1060	377.0	352.0
	700	18.0	17.0	140	240	240	130	1080	1070	412.0	399.0
1250	500	19.0	15.0	150	230	260	110	1080	1070	407.0	363.0
	600	19.0	16.0	150	230	260	120	1080	1080	433.0	397.0
1300	700	19.0	17.0	150	240	260	130	1090	1090	466.0	442.0
	800	19.0	18.0	150	240	260	140	1090	1100	501.0	490.0



K型縮管

SHINNAN CASTING FACTORY CO., LTD.

單位：mm

標稱管徑		管 厚		各 部 尺 度						質 量 (Kg)	
D	d	T	t	A	B	C	E	L ₁	L ₂	承插	插承
1000	600	20.0	16.0	170	230	260	120	1100	1080	508	443
	700	20.0	17.0	170	240	260	130	1110	1090	538	485
	800	20.0	18.0	170	240	260	140	1110	1100	570	530
	900	20.0	19.0	170	260	260	150	1130	1110	615	586
1100	700	21.0	17.0	180	240	280	130	1220	1210	646	578
	800	21.0	18.0	180	240	280	140	1220	1220	680	626
	900	21.0	19.0	180	260	280	150	1240	1230	726	683
1200	1000	21.0	20.0	180	260	280	170	1240	1250	771	758
	800	22.0	18.0	190	240	280	140	1230	1220	760	683
	900	22.0	19.0	190	260	280	150	1250	1230	803	737
1350	1000	22.0	20.0	190	260	280	170	1250	1250	844	808
	1100	22.0	21.0	190	280	280	180	1270	1260	903	880
	900	24.0	19.0	210	260	300	150	1270	1250	958	860
1500	1000	24.0	20.0	210	260	300	170	1270	1270	993	925
	1100	24.0	21.0	210	280	300	180	1290	1280	1040	991
	1200	24.0	22.0	210	280	300	190	1290	1290	1090	1060
1600	1000	26.0	21.0	230	260	300	170	1290	1270	1190	1070
	1100	26.0	21.0	230	280	300	180	1310	1280	1220	1110
	1200	26.0	22.0	230	280	300	190	1310	1290	1260	1180
1650	1350	26.0	24.0	230	300	300	210	1330	1310	1360	1310
	1000	27.5	21.0	230	260	300	170	1390	1370	1390	1230
	1100	27.5	22.0	230	280	300	180	1410	1380	1440	1290
1800	1200	27.5	23.0	230	280	300	190	1410	1390	1480	1350
	1350	27.5	24.0	230	300	300	210	1430	1410	1560	1470
	1500	27.5	26.0	230	300	300	210	1430	1410	1670	1620
1650	1000	28.0	21.0	230	260	300	170	1390	1370	1470	1280
	1100	28.0	22.0	230	280	300	180	1410	1380	1510	1340
	1200	28.0	23.0	230	280	300	190	1410	1390	1560	1400
2000	1350	28.0	24.0	230	300	300	210	1430	1410	1640	1510
	1500	28.0	26.0	230	300	300	210	1430	1410	1740	1650
	1600	28.0	27.5	230	300	300	210	1430	1410	1830	1780
1800	1100	30.0	22.0	230	280	300	180	1410	1380	1750	1510
	1200	30.0	23.0	230	280	300	190	1410	1390	1780	1570
	1350	30.0	24.0	230	300	300	210	1430	1410	1850	1670
2000	1500	30.0	26.0	230	300	300	210	1430	1410	1940	1790
	1600	30.0	27.5	230	300	300	210	1430	1410	2010	1910
	1650	30.0	28.0	230	300	300	210	1430	1410	2050	1970
2100	1200	32.0	24.0	230	280	300	190	1410	1390	2170	1850
	1350	32.0	25.0	230	300	300	210	1430	1410	2210	1940
	1500	32.0	26.0	230	300	300	210	1430	1410	2260	2020
2200	1600	32.0	27.5	230	300	300	210	1430	1410	2320	2110
	1650	32.0	28.0	230	300	300	210	1430	1410	2340	2170
	1800	32.0	30.0	230	320	300	210	1450	1410	2480	2330
2100	1350	33.0	25.0	250	300	320	210	1450	1430	2440	2110
	1500	33.0	26.0	250	300	320	210	1450	1430	2480	2190
	1600	33.0	27.5	250	300	320	210	1450	1430	2530	2270
2200	1650	33.0	28.0	250	300	320	210	1450	1430	2550	2320
	1800	33.0	30.0	250	320	320	210	1470	1430	2670	2470
	2000	33.0	32.0	250	320	320	210	1470	1430	2830	2720
2400	1500	34.0	26.0	250	300	320	210	1450	1430	2700	2350
	1600	34.0	27.5	250	300	320	210	1450	1430	2740	2430
	1650	34.0	28.0	250	300	320	210	1450	1430	2760	2480
2600	1800	34.0	30.0	250	320	320	210	1470	1430	2860	2600
	2000	34.0	32.0	250	320	320	210	1470	1430	3000	2830
	2100	34.0	33.0	250	320	320	210	1470	1430	3080	2960
2400	1600	36.0	27.5	270	300	320	210	1570	1530	3320	2840
	1650	36.0	28.0	270	300	320	210	1570	1530	3330	2890
	1800	36.0	30.0	270	320	320	210	1590	1530	3430	3010
2600	2000	36.0	32.0	270	320	320	210	1590	1530	3550	3220
	2100	36.0	33.0	270	320	320	210	1590	1530	3630	3340
	2200	36.0	34.0	270	320	320	210	1590	1530	3720	3490
2600	1600	37.5	27.5	240	335	385	190	1935	1935	4060	3520
	1650	37.5	28.0	240	340	385	195	1890	1890	4040	3530
	1800	37.5	30.0	240	345	385	200	1745	1745	3980	3510
2600	2000	37.5	32.0	240	355	385	210	1555	1555	3850	3470
	2100	37.5	33.0	240	360	385	215	1460	1460	3780	3430
	2200	37.5	34.0	240	365	385	220	1365	1365	3700	3400
2400	37.5	36.0	240	375	385	230	1175	1175	3480	3290	

SHINNAN CASTING FACTORY CO., LTD.