




● K型凸緣丁字管 (排氣閥用 · 消防栓用 · 人孔用)

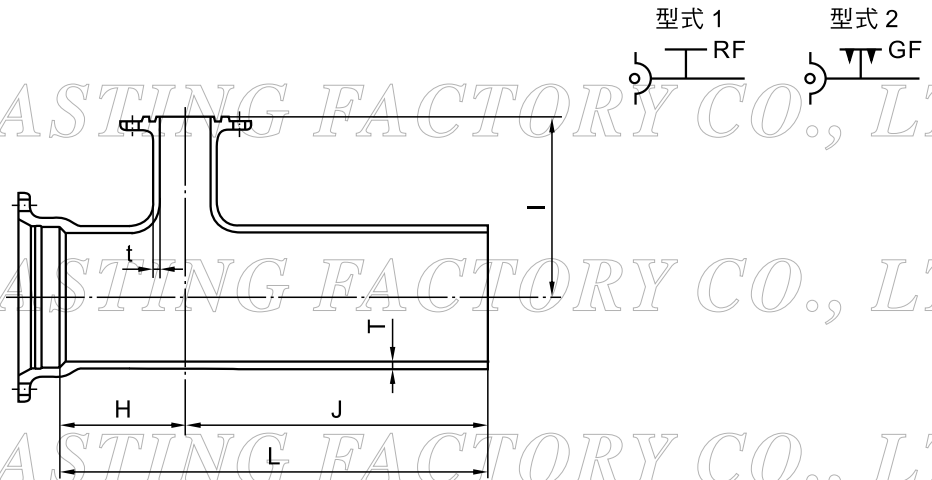

單位：mm

標稱管徑		管 厚		各部尺度				質量 (Kg)				
D	d	T	t	H	I	J	L	型 式 1		型 式 2		
								7.5K	7.5K	10K	16K	20K
75	75	8.5	8.5	150	250	480	630	22.2	22.1	20.6	21.3	21.6
100	75	8.5	8.5	160	250	500	660	27.1	27.0	25.5	26.2	26.5
150	75	9.0	8.5	160	280	530	690	38.5	38.4	36.9	37.6	37.9
	100	9.0	8.5	170	280	550	720	41.1	40.9	39.1	40.3	40.7
200	75	11.0	10.0	170	300	540	710	55.8	55.7	54.2	54.9	55.2
	100	11.0	10.0	180	300	550	730	58.5	58.4	56.6	57.8	58.2
250	75	12.0	10.0	180	330	550	730	73.3	73.2	71.7	72.4	72.7
	100	12.0	10.0	190	330	560	750	76.3	76.2	74.4	75.6	76.0
300	75	12.5	10.0	190	350	550	740	95.0	94.9	93.4	94.2	94.4
	100	12.5	10.0	200	350	560	760	98.4	98.2	96.4	97.7	98.0
350	75	13.0	10.0	200	380	560	760	115.0	115.0	114.0	114.0	115.0
	100	13.0	10.0	210	380	560	770	118.0	118.0	116.0	117.0	118.0
400	75	14.0	10.0	210	320	560	770	139.0	139.0	137.0	138.0	138.0
	100	14.0	10.0	210	400	560	770	142.0	142.0	140.0	141.0	142.0
450	75	14.5	10.0	220	340	560	780	163.0	163.0	161.0	162.0	162.0
	100	14.5	10.0	220	400	560	780	165.0	165.0	163.0	165.0	165.0
500	75	15.0	10.0	230	360	560	790	188.0	188.0	186.0	187.0	187.0
	100	15.0	10.0	230	400	560	790	190.0	190.0	188.0	189.0	189.0
600	75	16.0	11.0	240	410	570	810	242.0	242.0	241.0	241.0	242.0
	100	16.0	11.0	240	450	570	810	244.0	244.0	242.0	244.0	244.0
700	75	17.0	12.0	260	480	580	840	311.0	311.0	310.0	311.0	311.0
	100	17.0	12.0	260	480	580	840	313.0	313.0	311.0	312.0	312.0
800	75	18.0	13.0	270	520	590	860	382.0	382.0	381.0	381.0	382.0
	100	18.0	13.0	270	520	590	860	383.0	383.0	381.0	383.0	383.0
	600	18.0	16.0	690	670	1030	1720	731.0	730.0	730.0	766.0	777.0
900	100	19.0	14.0	300	590	620	920	482.0	482.0	480.0	481.0	482.0
	600	19.0	16.0	600	690	940	1540	777.0	776.0	777.0	812.0	824.0
1000	150	20.0	15.0	320	640	640	960	592.0	592.0	591.0	593.0	594.0
	600	20.0	16.0	680	770	990	1670	970.0	969.0	969.0	1010.0	1020.0
1100	150	21.0	16.0	340	700	660	1000	707.0	707.0	706.0	708.0	709.0
	600	21.0	16.0	650	800	1000	1650	1100.0	1090.0	1090.0	1130.0	1140.0
1200	150	22.0	17.0	360	750	680	1040	831.0	830.0	830.0	832.0	833.0
	600	22.0	17.0	680	860	1000	1680	1260.0	1260.0	1260.0	1300.0	1310.0
1350	150	24.0	19.0	380	830	700	1080	1050.0	1050.0	1050.0	1050.0	1050.0
	600	24.0	19.0	700	950	1000	1700	1560.0	1560.0	1560.0	1600.0	1610.0
1500	150	26.0	21.0	420	910	720	1140	1310.0	1310.0	1310.0	1310.0	1320.0
	600	26.0	21.0	730	1050	1000	1730	1900.0	1900.0	1900.0	1940.0	1950.0
1600	600	27.5	21.0	730	1070	1050	1780	2180.0	2180.0	2180.0	2210.0	2220.0
1650	600	28.0	21.0	730	1100	1050	1780	2300.0	2300.0	2300.0	2330.0	2350.0
1800	600	30.0	21.0	740	1170	1050	1790	2680.0	2680.0	2680.0	2720.0	2730.0
2000	600	32.0	21.0	750	1280	1050	1800	3220.0	3220.0	3220.0	3260.0	3270.0
2100	600	33.0	21.0	760	1340	1050	1810	3520.0	3520.0	3520.0	3550.0	3570.0
2200	600	34.0	21.0	760	1390	1060	1820	3840.0	3840.0	3840.0	3880.0	3890.0
2400	600	36.0	21.0	770	1490	1080	1850	4480.0	4480.0	4480.0	4520.0	4530.0
2600	600	37.5	21.0	760	1560	900	1660	4770.0	4770.0	4770.0	4810.0	4820.0

備考：1. d之標稱管徑75及100 mm者，為排氣閥用及消防栓用；標稱管徑600 mm者，為人孔用之管。

2. 附圖係表型式2。

3. d之標稱管徑600 mm者，使用於排氣閥用及消防栓用時，須使用人孔蓋。