



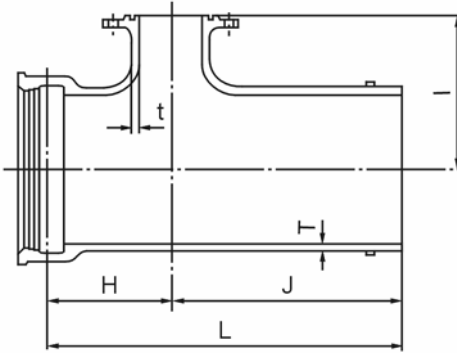

●U型凸緣丁字管 (排氣閥用, 消防栓用, 人孔用)



單位: mm

標稱管徑		管厚		各部尺度				質量 (kg)				
D	d	T	t	H	I	J	L	型式 1		型式 2		
								7.5K	7.5K	10K	16K	20K
700	75	17.0	12	365	480	580	945	381	381	380	380	381
700	100	17.0	12	365	480	580	945	383	382	381	382	382
800	75	18.0	13	375	520	590	965	469	469	467	468	468
800	100	18.0	13	375	520	590	965	470	470	468	469	470
800	600	18.0	16	795	670	1030	1825	818	817	817	853	864
900	100	19.0	14	405	590	620	1025	576	576	574	575	575
900	600	19.0	16	705	690	940	1645	871	870	870	906	917
1000	150	20.0	15	425	640	640	1065	691	690	690	692	693
1000	600	20.0	16	785	770	990	1775	1070	1070	1070	1100	1120
1100	150	21.0	16	445	700	660	1105	823	823	822	824	825
1100	600	21.0	16	755	800	1000	1755	1210	1210	1210	1250	1260
1200	150	22.0	17	465	750	680	1145	956	956	956	958	959
1200	600	22.0	17	785	860	1000	1785	1390	1390	1390	1430	1440
1350	150	24.0	19	485	830	700	1185	1200	1200	1200	1200	1200
1350	600	24.0	19	805	950	1000	1805	1710	1710	1710	1750	1760
1500	150	26.0	21	525	910	720	1245	1490	1490	1490	1490	1490
1500	600	26.0	21	835	1050	1000	1835	2080	2080	2080	2110	2130
1600	600	27.5	21	845	1070	1050	1895	2390	2390	2390	2430	2440
1650	600	28.0	21	845	1100	1050	1895	2520	2510	2510	2550	2560
1800	600	30.0	21	855	1170	1050	1905	2910	2910	2910	2950	2960
2000	600	32.0	21	865	1280	1050	1915	3480	3480	3480	3520	3530
2100	600	33.0	21	875	1340	1050	1925	3790	3790	3790	3820	3830
2200	600	34.0	21	875	1390	1060	1935	4110	4110	4110	4140	4150
2400	600	36.0	21	885	1490	1080	1965	4790	4790	4790	4830	4840
2600	600	37.5	21	890	1560	900	1790	5340	5340	5340	5370	5380

備考: 1. d 之承口為標稱管徑 75 15 mm 者為消防栓用及排氣閥用, 標稱管徑 600 mm 者為人孔用之管。

2. 標稱管徑 600 mm 者使用於排氣閥用及消防栓用時, 須使用人孔蓋。