



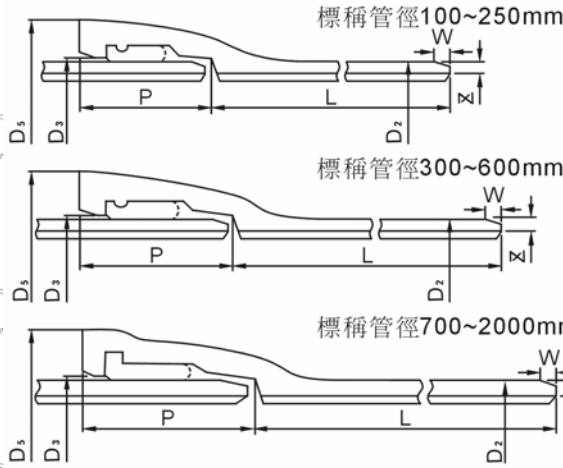

● T型延性鑄鐵管

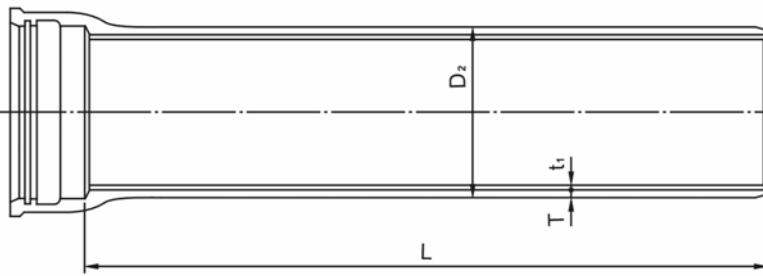

■接合部詳細

單位：mm

標稱管徑	管 厚								內襯厚度	外徑	各 部 尺 度							有效長度	參 考 質 量 (kg)								
	T										D ₃	D ₅	P	W	Z	L	承 口 凸出部			一 支 總 質 量							
	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5												t ₁	D ₂	D ₁	D1.5	D2	D2.5	D3	D3.5
100	7.5	-	-	-	6.0	-	-	-	3.5	118.0	120.8	174	87.0	9.5	3.2	4000	5.11	79.6	-	-	-	65.4	-	-	-	-	
																5000		98.2	-	-	-	80.6	-	-	-	-	
																6000		116.8	-	-	-	95.7	-	-	-	-	
150	7.5	-	-	-	6.0	-	-	-	3.5	169.0	171.8	228	88.0	9.5	3.2	5000	7.63	144.0	-	-	-	117.0	-	-	-	-	
																6000		170.9	-	-	-	139.5	-	-	-	-	
200	7.5	-	-	-	6.0	-	-	-	3.5	220.0	223.0	282	105.0	9.5	3.2	5000	11.5	190.0	-	-	-	156.0	-	-	-	-	
																6000		226.3	-	-	-	184.5	-	-	-	-	
250	7.5	-	-	-	6.0	-	-	-	3.5	271.6	274.6	334	114.0	9.5	3.2	5000	15.0	237.0	-	-	-	194.0	-	-	-	-	
																6000		281.9	-	-	-	229.8	-	-	-	-	
300	7.5	-	-	-	6.5	-	-	-	3.5	322.8	325.8	386	115.0	9.5	3.2	6000	17.3	336.0	-	-	-	294.0	-	-	-	-	
350	7.5	-	-	-	6.5	-	-	-	5.0	374.0	377.6	450	130.0	14.0	5.0	6000	24.4	395.0	-	-	-	346.0	-	-	-	-	
400	8.5	-	7.5	-	7.0	-	-	-	5.0	425.6	429.2	502	130.0	14.0	5.0	6000	27.6	505.0	-	450	-	423.0	-	-	-	-	
450	9.0	-	8.0	-	7.5	-	-	-	5.0	476.8	480.4	555	130.0	14.0	5.0	6000	32.8	600.0	-	538	-	507.0	-	-	-	-	
500	9.5	-	8.5	-	8.0	-	-	-	5.0	528.0	531.6	608	135.0	14.0	5.0	6000	37.9	702.0	-	633	-	599.0	-	-	-	-	
600	11.0	-	10.0	-	9.0	-	8.5	-	5.0	630.8	634.4	713	140.0	14.0	5.0	6000	49.1	968.0	-	886	-	803.0	-	762	-	-	
700	12.0	-	11.0	-	10.0	-	9.0	-	6.0	733.0	737.0	826	155.0	15.0	6.0	6000	69.6	1240.0	-	1140	-	1040.0	-	948	-	-	
800	13.5	-	12.0	-	11.0	-	10.0	-	6.0	836.0	840.0	931	160.0	15.0	6.0	6000	85.4	1580.0	-	1420	-	1310.0	-	1200	-	-	
900	15.0	-	13.0	-	12.0	-	11.0	-	6.0	939.0	943.0	1036	175.0	15.0	6.0	6000	108.0	1980.0	-	1730	-	1610.0	-	1480	-	-	
1000	16.5	-	14.5	-	13.0	-	12.0	-	6.0	1041.0	1045.0	1148	185.0	19.0	7.5	6000	135.0	2410.0	-	2140	-	1940.0	-	1800	-	-	
1100	18.0	-	15.5	-	14.0	-	13.0	-	6.0	1144.0	1148.0	1253	200.0	19.0	7.5	6000	164.0	2900.0	-	2520	-	2300.0	-	2150	-	-	
1200	19.5	-	17.0	-	15.0	-	13.5	-	6.0	1246.0	1250.0	1357	215.0	19.0	7.5	6000	196.0	3420.0	-	3010	-	2680.0	-	2440	-	-	
1350	21.5	-	18.5	-	16.5	-	15.0	-	9.0	1400.0	1404.0	1523	235.0	23.0	8.5	6000	265.0	4260.0	-	3710	-	3340.0	-	3060	-	-	
1500	23.5	-	20.5	-	18.0	-	16.5	-	9.0	1554.0	1558.0	1685	260.0	23.0	8.5	6000	343.0	5190.0	-	4580	-	4070.0	-	3670	-	-	
1600	25.0	23.5	22.0	20.5	19.0	18.0	17.5	16.0	9.0	1650.0	1654.0	1783	275.0	23.0	8.5	4000	396.0	4050.0	3830	3610	3400	3180.0	3040	2960	2750	-	
																5000		4960.0	4690	4420	4150	3880.0	3700	3600	3330	-	
1650	25.5	24.0	22.5	21.0	19.5	18.5	18.0	16.5	9.0	1701.0	1705.0	1836	280.0	23.0	8.5	4000	428.0	4270.0	4040	3820	3600	3370.0	3220	3150	2930	-	
																5000		5230.0	4950	4670	4390	4110.0	3920	3830	3550	-	
1800	28.0	26.0	24.0	22.5	21.0	20.0	19.5	18.0	9.0	1848.0	1852.0	1991	305.0	26.0	9.5	4000	534.0	5110.0	4790	4470	4220	3980.0	3820	3740	3490	-	
																5000		6260.0	5850	5450	5150	4840.0	4640	4540	4230	-	
2000	30.5	28.5	26.5	25.0	23.5	22.0	21.0	19.5	9.0	2061.0	2065.0	2214	335.0	26.0	9.5	4000	708.0	6270.0	5910	5550	5280	5010.0	4740	4560	4290	-	
																5000		7660.0	7210	6760	6420	6090.0	5750	5520	5180	-	

備考 1.承口凸出部及直部 1m 之參考質量為修整至有效數字者，故其總合與平均每一支參考質量未必一致。

2.表列以外之長度由買賣雙方協議之。

3.內襯厚度為水泥砂漿襯層厚度。