

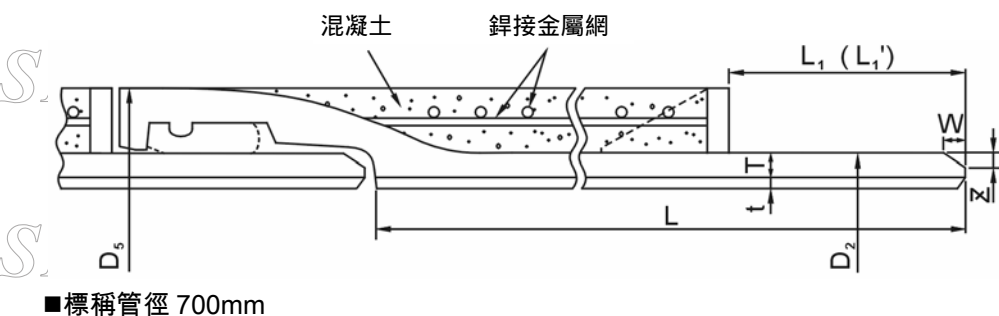

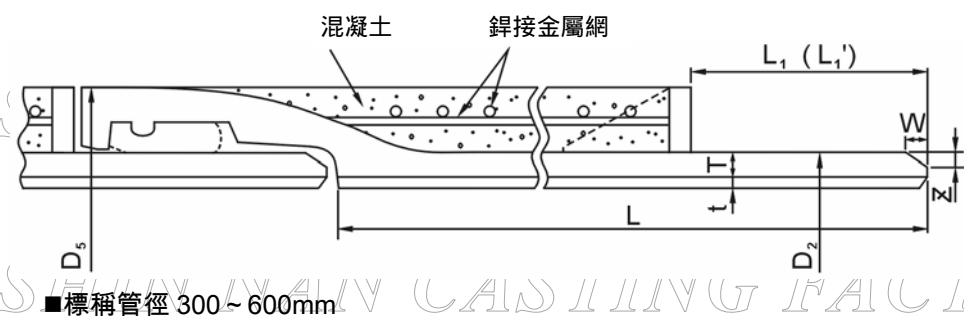




● T型推進工法用延性鑄鐵管

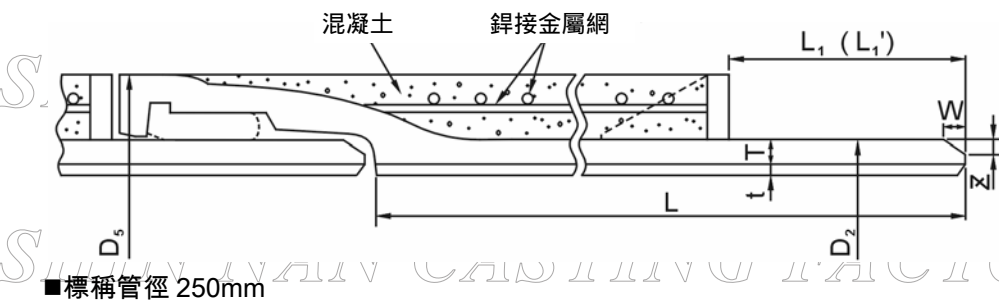

單位：mm

標稱管徑 D	管 厚									內襯厚度 t	有效長度 L	各 部 尺 度								
	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5	D5			D ₂	D ₅	L ₁	M	N	K	L ₁ '	W	Z
250	7.5	-	-	-	6.0	-	-	-	-	3.5	5000	271.6	334	109	14	70	14	250	9.5	3.2
300	7.5	-	-	-	6.5	-	-	-	-	3.5	6000	322.8	386	110	14	70	14	300	9.5	3.2
350	7.5	-	-	-	6.5	-	-	-	-	5.0	6000	374.0	450	125	16	80	16	300	14.0	5.0
400	8.5	-	7.5	-	7.0	-	-	-	-	5.0	6000	425.6	502	125	16	80	16	300	14.0	5.0
450	9.0	-	8.0	-	7.5	-	-	-	-	5.0	6000	476.8	555	125	16	80	16	300	14.0	5.0
500	9.5	-	8.5	-	8.0	-	-	-	-	5.0	6000	528.0	608	130	16	90	16	300	14.0	5.0
600	11.0	-	10.0	-	9.0	-	8.5	-	7.5	5.0	6000	630.8	713	135	16	90	16	330	14.0	5.0
700	12.0	-	11.0	-	10.0	-	9.0	-	8.0	6.0	6000	733.0	826	150	19	140	19	360	15.0	6.0

備考：L₁'為先頭管尺寸。