





TS型推進工法用延性鑄鐵管


SHIN NAN CASTING FACTORY CO., LTD.

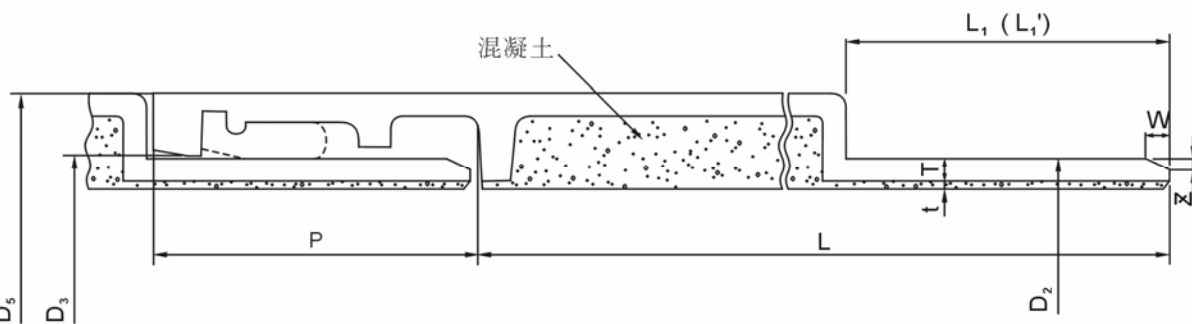

■標稱管徑 250mm

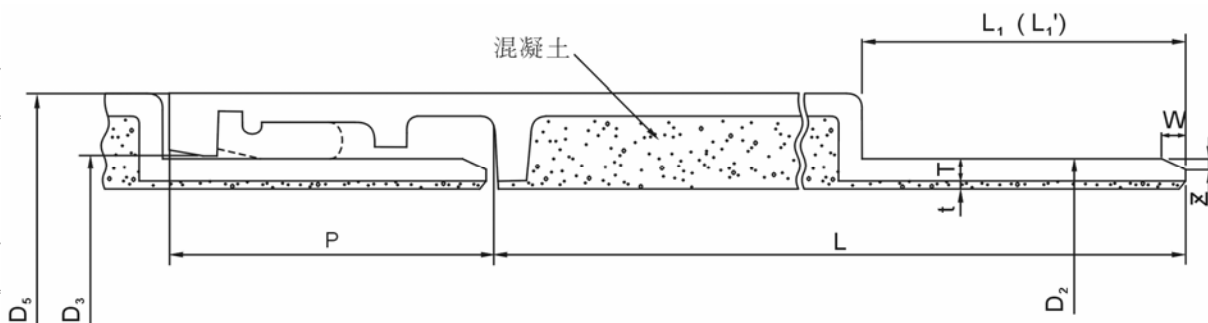

■標稱管徑 300~600mm

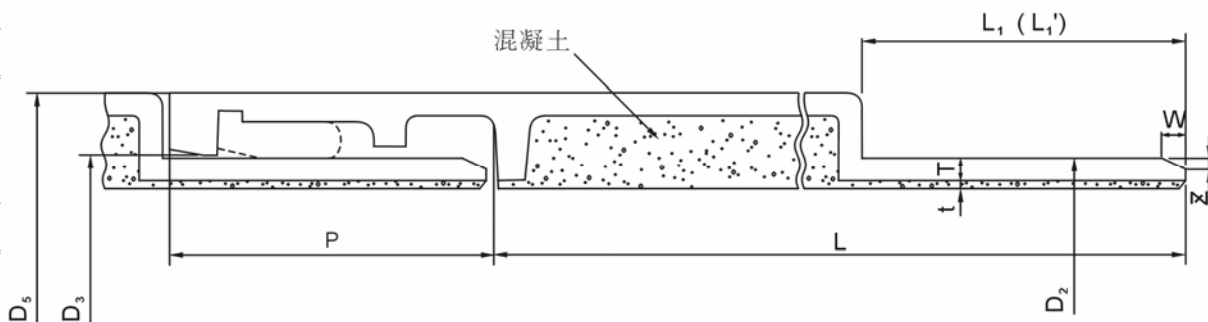

■標稱管徑 700~2000mm

SHIN NAN CASTING FACTORY CO., LTD. 單位：mm

標稱管徑	管厚 內襯厚度 有效長度			各部尺度								參考質量 (kg)
	T	t	L	D ₂	D ₃	P	D ₅	L ₁	L ₁ '	W	Z	
250	9.0	3.5	1000	271.6	274.6	114	314.7	109	250	9.5	3.2	72.5
300	9.6	3.5	1000	322.8	325.8	115	367.1	110	300	9.5	3.2	93.4
400	10.8	5.0	1000	425.6	429.2	130	482.8	125	300	14.0	5.0	135.6
500	12.0	5.0	1000	528.0	531.6	135	587.6	130	300	14.0	5.0	188.3
600	13.2	5.0	1000	630.8	634.4	140	692.8	135	330	14.0	5.0	246.6
700	14.4	6.0	1000	733.0	737.0	155	818.8	150	360	15.0	6.0	335.8
800	15.6	6.0	2500	836.0	840.0	160	924.2	155	360	15.0	6.0	883.0
900	16.8	6.0	2500	939.0	943.0	175	1029.6	170	360	15.0	6.0	1064.8
1000	18.0	6.0	2500	1041.0	1045.0	185	1140.0	180	380	19.0	7.5	1277.1
1100	19.2	6.0	2500	1144.0	1148.0	200	1245.4	195	380	19.0	7.5	1495.6
1200	20.4	6.0	2500	1246.0	1250.0	215	1349.8	210	380	19.0	7.5	1730.8
1350	22.2	9.0	2500	1400.0	1404.0	235	1515.4	225	420	23.0	8.5	2146.2
1500	24.0	9.0	2500	1554.0	1558.0	260	1677.0	250	420	23.0	8.5	2596.2
1600	25.2	9.0	2500	1650.0	1654.0	275	1775.4	265	440	23.0	8.5	2808.1
1650	25.8	9.0	2500	1701.0	1705.0	280	1827.6	270	440	23.0	8.5	3061.5
1800	27.6	9.0	2500	1848.0	1852.0	305	1982.2	295	480	26.0	9.5	3592.0
2000	30.0	9.0	2500	2061.0	2065.0	335	2204.0	325	530	26.0	9.5	4398.8

備考：L₁'為先頭管尺寸。

SHIN NAN CASTING FACTORY CO., LTD.