





U型延性鑄鐵管

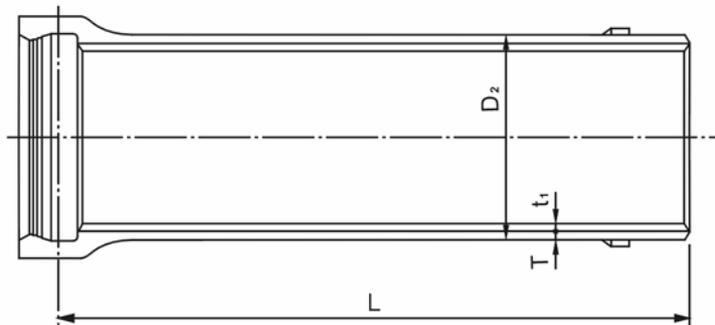

阻擋(設於圓周上4處等分之位置)

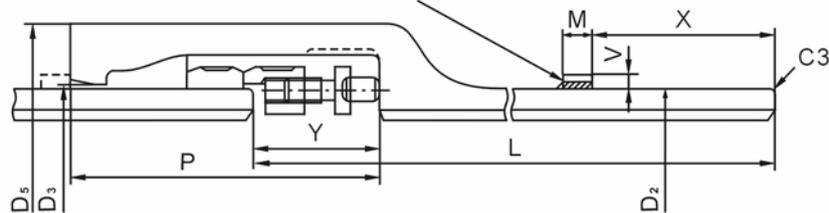

■接合部詳細

單位 : mm

標稱管徑 D	管 厚								內襯厚度 t ₁	外徑 D ₂	各 部 尺 度								有效長度 L	鑄 鐵 質 量		一 支 總 質 量 (kg)							
	T										D ₃	D ₅	P	Y	M	V	X	承口凸出部		阻擋凸出部	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5	
	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5																					
700	12.0	-	11.0	-	10.0	-	9.0	-	6	733	738	831	265	105	25	16	160	6000	161	0.942	1310	-	1210	-	1120	-	1020	-	
800	13.5	-	12.0	-	11.0	-	10.0	-	6	836	841	938	265	105	25	16	160	6000	197	0.942	1670	-	1510	-	1400	-	1290	-	
900	15.0	-	13.0	-	12.0	-	11.0	-	6	939	944	1043	265	105	25	16	160	6000	231	0.942	2070	-	1830	-	1700	-	1580	-	
1000	16.5	-	14.5	-	13.0	-	12.0	-	6	1041	1047	1151	270	105	25	16	165	6000	276	0.942	2520	-	2250	-	2050	-	1910	-	
1100	18.0	-	15.5	-	14.0	-	13.0	-	6	1144	1150	1258	270	105	25	16	165	6000	324	0.942	3010	-	2640	-	2420	-	2270	-	
1200	19.5	-	17.0	-	15.0	-	13.5	-	6	1246	1252	1362	270	105	25	16	165	6000	365	0.942	3530	-	3130	-	2810	-	2570	-	
1350	21.5	-	18.5	-	16.5	-	15.0	-	9	1400	1406	1521	280	105	25	16	175	6000	451	0.942	4380	-	3840	-	3470	-	3200	-	
1500	23.5	-	20.5	-	18.0	-	16.5	-	9	1554	1560	1679	285	105	25	16	180	6000	541	0.942	5300	-	4700	-	4200	-	3900	-	
1600	25.0	23.5	22.0	20.5	19.0	18.0	17.5	16.0	9	1650	1656	1786	295	115	25	16	180	4000	640	0.942	4190	3980	3770	3560	3350	3200	3130	2920	
																		5000			5100	4840	4570	4310	4040	3860	3780	3510	
1650	25.5	24.0	22.5	21.0	19.5	18.5	18.0	16.5	9	1701	1707	1839	295	115	25	16	180	4000	678	0.942	4410	4190	3970	3760	3540	3400	3320	3100	
																		5000			5370	5100	4820	4550	4280	4090	4000	3730	
1800	28.0	26.0	24.0	22.5	21.0	20.0	19.5	18.0	9	1848	1854	1990	295	115	25	16	180	4000	779	0.942	5230	4910	4600	4360	4130	3970	3890	3650	
																		5000			6370	5980	5580	5290	4990	4790	4690	4390	
2000	30.5	28.5	26.5	25.0	23.5	22.0	21.0	19.5	9	2061	2067	2209	300	115	25	16	185	4000	951	0.942	6360	6010	5660	5390	5130	4870	4690	4430	
																		5000			7750	7310	6870	6540	6210	5870	5650	5320	

備考：1.承口凸出部之參考質量為修整至有效數字者，故其總和與平均每一支參考質量未必一致。

2.承口內面之形狀，可依虛線之形狀。

3.表列以外之有效長度由買賣雙方協議之。

4.內襯厚度為水泥砂漿襯層厚度。