




●推進工法用延性鑄鐵管注入孔

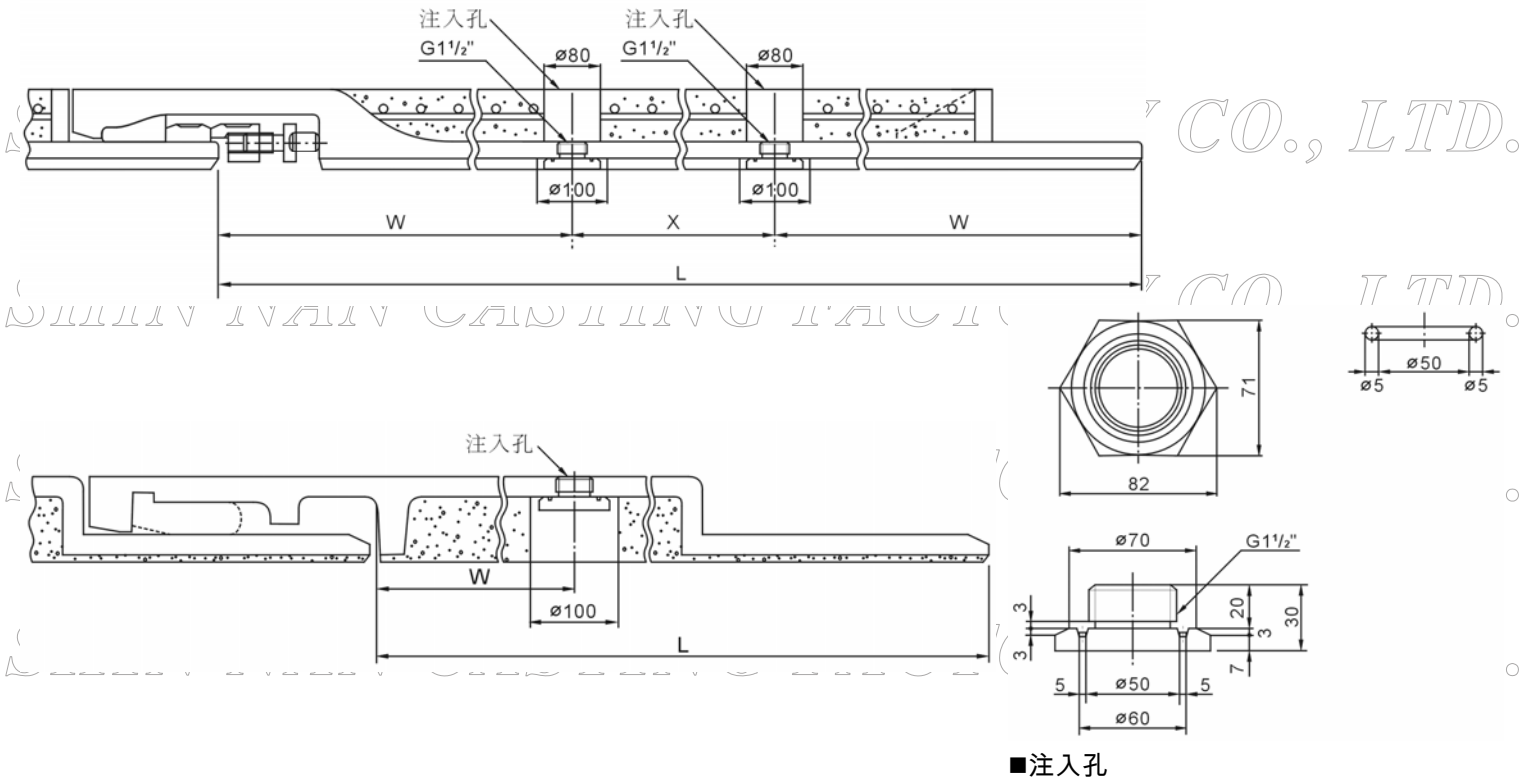

■注入孔

單位：mm

標稱管徑	有效長度		各 部 尺 度	
	L		W	X
800	2500		1200	-
	6000		1500	3000
900	2500		1200	-
	6000		1500	3000
1000	2500		1200	-
	6000		1500	3000
1100	2500		1150	-
	6000		1500	3000
1200	2500		1150	-
	6000		1500	3000
1350	2500		1150	-
	6000		1500	3000
1500	2500		1100	-
	6000		1500	3000
1600	2500		1100	-
	4000		1000	2000
1650	5000		1250	2500
	2500		1100	-
1800	4000		1000	2000
	5000		1250	2500
2000	2500		1100	-
	4000		1000	2000
	5000		1250	2500

備考：一般情況下，推進管並不須製作注入孔，依地層性質如須注入滑劑降低管線推進阻力或須注入填充材料防止地表塌陷等，由買賣雙方協議之。