




●單插口聯接分支管

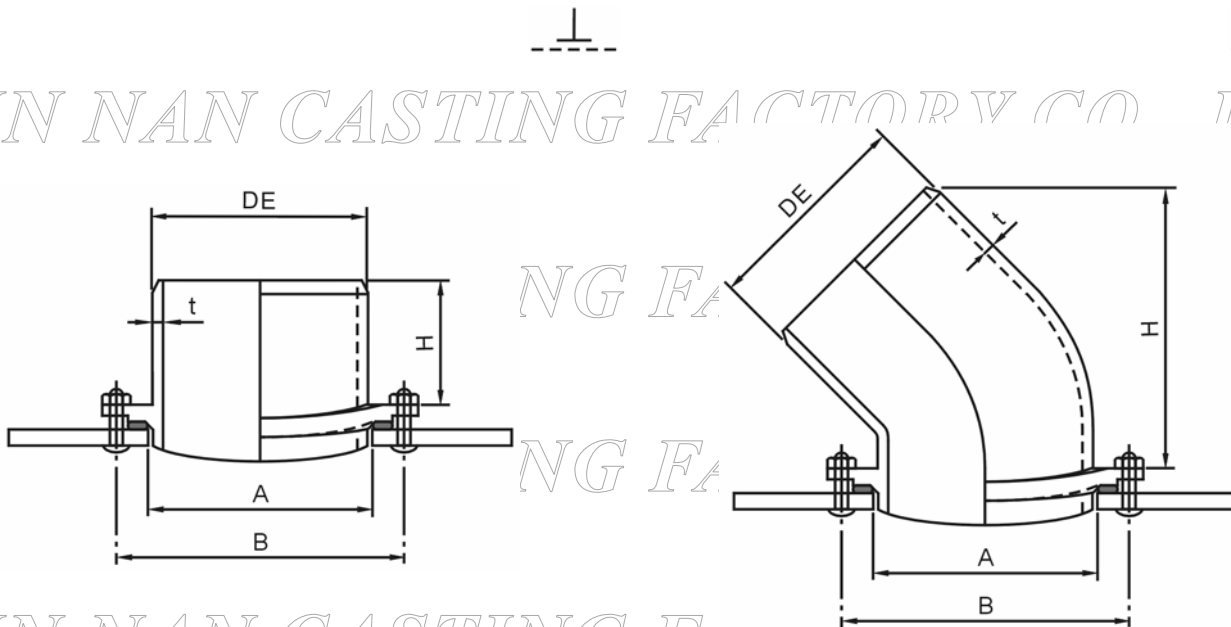

單位：mm

| 90°  |     |       |       |     |     |      |              | 45°  |     |     |       |     |     |     |              |
|------|-----|-------|-------|-----|-----|------|--------------|------|-----|-----|-------|-----|-----|-----|--------------|
| 標稱管徑 |     | 管厚    | 各部尺度  |     |     |      | 參考質量<br>(kg) | 標稱管徑 |     | 管厚  | 各部尺度  |     |     |     | 參考質量<br>(kg) |
| D    | d   | t     | DE    | A   | B   | H    |              | D    | d   | t   | DE    | A   | B   | H   |              |
| 200  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.9         | 200  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.6         |
| 250  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.6         | 250  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.4         |
| 300  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.5         | 300  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.3         |
| 200  | 8.4 | 220.0 | 223   | 299 | 145 | 19.5 |              |      |     |     |       |     |     |     |              |
| 350  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.4         | 350  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.1         |
|      | 200 | 8.4   | 220.0 | 223 | 299 | 145  | 19.3         |      |     |     |       |     |     |     |              |
| 400  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.3         | 400  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.1         |
|      | 200 | 8.4   | 220.0 | 223 | 299 | 145  | 19.1         |      |     |     |       |     |     |     |              |
| 450  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.3         | 450  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.0         |
| 500  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.2         | 500  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.0         |
| 600  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.2         | 600  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.0         |
| 700  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.2         | 700  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 14.9         |
| 800  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.2         | 800  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 14.9         |
| 900  | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.2         | 900  | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 14.9         |
| 1000 | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.2         | 1000 | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.0         |
| 1100 | 150 | 7.8   | 169.0 | 171 | 247 | 130  | 13.2         | 1100 | 150 | 7.8 | 169.0 | 171 | 247 | 250 | 15.0         |
| 1200 | 200 | 8.4   | 220.0 | 223 | 299 | 145  | 18.6         | 1200 | 200 | 8.4 | 220.0 | 223 | 299 | 300 | 21.7         |
| 1350 | 200 | 8.4   | 220.0 | 223 | 299 | 145  | 18.6         | 1350 | 200 | 8.4 | 220.0 | 223 | 299 | 300 | 21.7         |
| 1500 | 200 | 8.4   | 220.0 | 223 | 299 | 145  | 18.7         | 1500 | 200 | 8.4 | 220.0 | 223 | 299 | 300 | 21.7         |
| 1600 | 200 | 8.4   | 220.0 | 223 | 299 | 145  | 18.7         | 1600 | 200 | 8.4 | 220.0 | 223 | 299 | 300 | 21.8         |
| 1650 | 200 | 8.4   | 220.0 | 223 | 299 | 145  | 18.7         | 1650 | 200 | 8.4 | 220.0 | 223 | 299 | 300 | 21.8         |
| 1800 | 250 | 9.0   | 271.6 | 275 | 360 | 160  | 26.3         | 1800 | 250 | 9.0 | 271.6 | 275 | 360 | 350 | 31.7         |
| 2000 | 250 | 9.0   | 271.6 | 275 | 360 | 160  | 26.3         | 2000 | 250 | 9.0 | 271.6 | 275 | 360 | 350 | 31.8         |