




Double Flanged 45° Bend

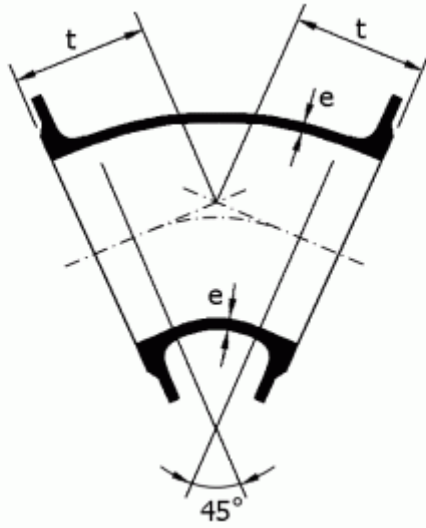

K=12

Unit: mm

DN	e	t	Weight (kg)			
			PN 10	PN 16	PN 25	PN 40
80	7.0	130	9.3	9.3	9.3	9.3
100	7.2	140	11.3	11.3	12.4	12.4
150	7.8	160	18.5	18.5	20.5	24.5
200	8.4	180	27.5	27.0	31.0	41.5
250	9.0	350	55.0	54.0	62.0	82.0
300	9.6	400	78.0	76.0	88.0	118.0
350	10.2	298	76.0	82.0	89.0	-
400	10.8	324	96.0	106.0	129.0	-
450	11.4	349	116.3	132.0	164.5	-
500	12.0	375	145.0	174.0	198.0	-
600	13.2	426	212.0	264.0	294.0	-
700	14.4	478	296.0	326.0	-	-
800	15.6	529	403.0	442.0	-	-
900	16.8	581	519.0	567.0	-	-
1000	18.0	632	668.0	751.0	-	-
1100	19.2	683	848.2	920.2	-	-
1200	20.4	750	1050.0	1178.0	-	-