




Double Flanged 22.5° Bend

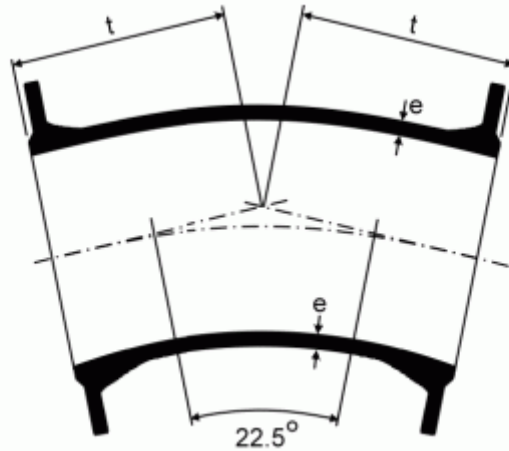

K=12			Unit: mm			
DN	e	t	Weight (kg)			
			PN 10	PN 16	PN 25	PN 40
80	7.0	130	9.5	9.2	9.5	9.5
100	7.2	140	11.6	11.5	12.6	12.6
150	7.8	160	18.9	18.6	20.9	25.1
200	8.4	180	28.0	27.0	31.8	42.4
250	9.0	350	56.5	54.5	63.5	83.7
300	9.6	400	79.9	77.5	90.3	121.3
350	10.2	298	78.2	83.0	101.0	143.4
400	10.8	324	98.1	107.0	131.9	199.3
450	11.4	349	119.6	135.0	167.8	214.4
500	12.0	375	148.3	176.0	202.1	269.3
600	13.2	426	218.0	267.0	299.4	404.6
700	14.4	478	306.8	342.0	400.8	-
800	15.6	529	419.1	448.0	549.1	-
900	16.8	581	535.3	588.0	697.3	-
1000	18.0	632	698.1	773.0	912.1	-
1100	19.2	683	874.5	952.0	1112.5	-
1200	20.4	735	996.1	1213.0	1370.1	-