




●Type T Flanged Socket

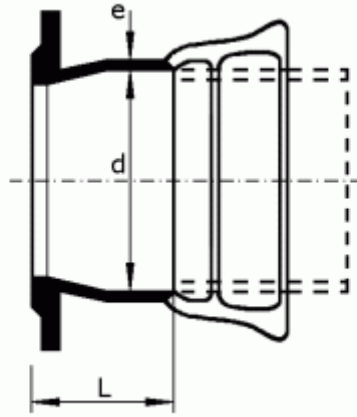

K=12 Unit: mm

DN	d	e	L	Weight (kg)			
				PN 10	PN 16	PN 25	PN 40
80	109.0	7.0	130	7.4	7.4	7.4	7.4
100	130.0	7.2	130	9.0	9.0	9.5	9.5
150	183.0	7.8	135	14.2	14.2	15.2	17.3
200	235.0	8.4	140	20.5	20.0	22.0	27.5
250	288.0	9.0	145	28.0	27.5	31.5	41.5
300	340.0	9.6	150	37.0	36.5	42.0	57.5
350	393.0	10.2	155	45.0	48.0	56.0	77.5
400	445.0	10.8	160	55.0	60.0	71.0	105.0
450	498.0	11.4	165	63.4	72.0	87.5	110.8
500	550.0	12.0	170	78.0	93.0	104.0	138.3
600	655.0	13.2	180	108.0	135.0	149.0	201.8
700	760.0	14.4	190	144.0	159.0	193.7	-
800	865.0	15.6	200	189.0	208.0	257.2	-
900	970.0	16.8	210	235.0	258.0	318.4	-
1000	1075.0	18.0	220	293.0	324.0	401.8	-
1100	1180.0	19.2	230	411.2	447.2	530.2	-
1200	1285.0	20.4	240	456.0	521.0	620.5	-