



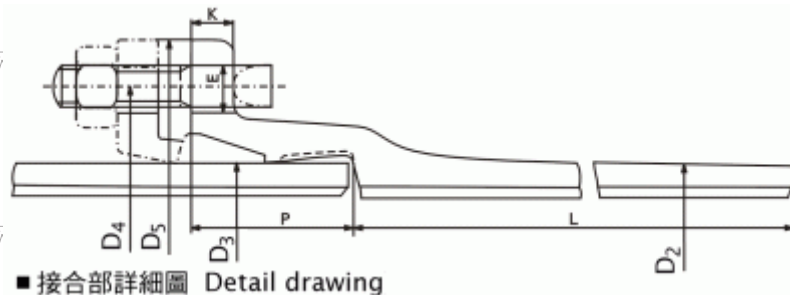

●Type A Socket and Spigot Pipe

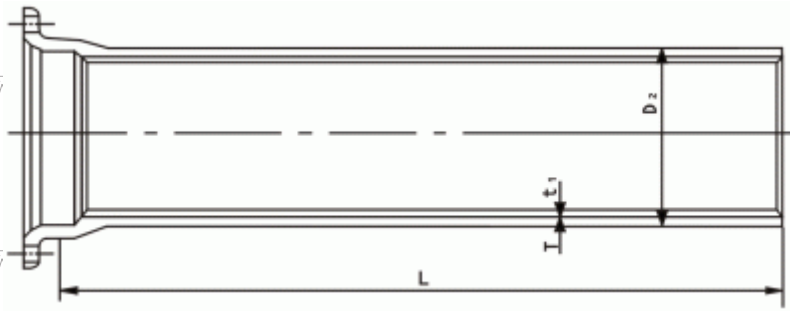

■ 接合部詳細圖 Detail drawing

Unit: mm

Nominal size	Thickness		Lining Thickness t_1	O.D.	Dimensions						Bolt No.	Effective Length L	Bell	Weight (kg)			
	T				D ₂	D ₃	D ₄	D ₅	E	P				K	Total Weight		
	D1	D3													D1	D3	Lining
75	7.5	6.0	4	93.0	97.0	159	197	19	65	18	4	4000	5.05	62.7	52.0	8.93	
100	7.5	6.0	4	118.0	122.0	186	232	23	65	19	4	6000	6.59	118.3	97.1	17.90	
150	7.5	6.0	4	169.0	173.0	241	287	23	65	20	6	6000	9.02	172.0	141.0	27.10	
200	7.5	6.0	4	220.0	224.0	292	338	23	65	21	6	6000	11.70	227.0	185.0	36.40	
250	7.5	6.0	4	271.6	275.6	348	394	23	65	22	8	6000	14.60	282.0	229.0	45.70	
300	7.5	6.0	6	322.8	326.8	399	445	23	65	23	8	6000	18.00	337.0	295.0	81.90	
350	7.5	6.0	6	374.0	378.0	458	504	23	90	24	10	6000	26.00	396.0	348.0	95.80	

Note: 1. The weights of the bells is rounded off to effective figures, therefore the total sums of the above values are not always equal to the total weights.

2. The shape of the bells shall be in accordance with the shape of the dotted line.

3. For pipe length other than the figure in table, please consult us.