




●Type U Tee with Flanged Branch (for Air Valve, Fire Hydrant and Man-Hole)

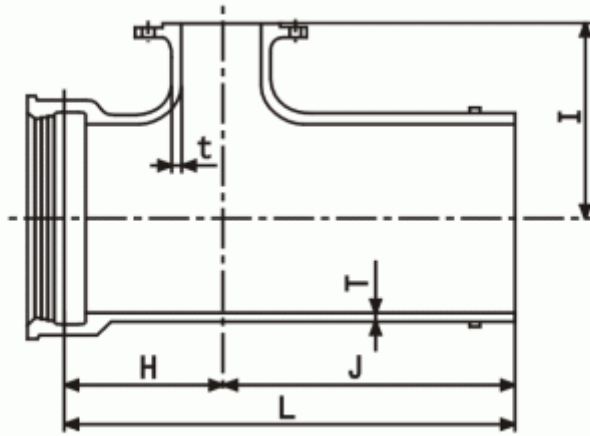

Unit: mm

Nominal size		Thickness		Dimensions				Weight (kg)			
D	d	T	t	H	I	J	L	7.5 K	10 K	16 K	20 K
700	75	17.0	12	365	480	580	945	381	381.7	428.5	473.6
700	100	17.0	12	365	480	580	945	383	383.4	430.7	475.9
800	75	18.0	13	375	520	590	965	469	469.1	534.1	615.4
800	100	18.0	13	375	520	590	965	470	469.8	535.3	616.7
800	600	18.0	16	795	670	1030	1825	818	819.7	920.0	1012.1
900	100	19.0	14	405	590	620	1025	576	569.2	646.1	746.5
900	600	19.0	16	705	690	940	1645	871	866.1	977.8	1088.9
1000	150	20.0	15	425	640	640	1065	691	689.4	798.5	-
1000	600	20.0	16	785	770	990	1775	1070	1069.1	1212.1	-
1100	150	21.0	16	445	700	660	1105	823	824.4	941.5	-
1100	600	21.0	16	755	800	1000	1755	1210	1212.1	1363.1	-
1200	150	22.0	17	465	750	680	1145	956	967.4	1104.5	-
1200	600	22.0	17	785	860	1000	1785	1390	1402.1	1573.1	-
1350	150	24.0	19	485	830	700	1185	1200	1212.4	1389.5	-
1350	600	24.0	19	805	950	1000	1805	1710	1723.1	1934.1	-
1500	150	26.0	21	525	910	720	1245	1490	1512.4	1726.5	-
1500	600	26.0	21	835	1050	1000	1835	2080	2103.1	2351.1	-
1600	600	27.5	21	845	1070	1050	1895	2390	2410.1	-	-
1650	600	28.0	21	845	1100	1050	1895	2520	2542.1	-	-
1800	600	30.0	21	855	1170	1050	1905	2910	2950.1	-	-
2000	600	32.0	21	865	1280	1050	1915	3480	3541.1	-	-
2100	600	33.0	21	875	1340	1050	1925	3790	3865.1	-	-
2200	600	34.0	21	875	1390	1060	1935	4110	4108.1	-	-
2400	600	36.0	21	885	1490	1080	1965	4790	4903.1	-	-
2600	600	37.5	21	890	1560	900	1790	5340	5474.1	-	-

- Note: 1. d bell of 75~15 mm shall be applied to fire hydrant or air valve.  
 2. d bell of 600 mm shall be applied to man-hole.  
 3. d bell of 600mm for air valve and fire hydrant shall be fixed with covers.