
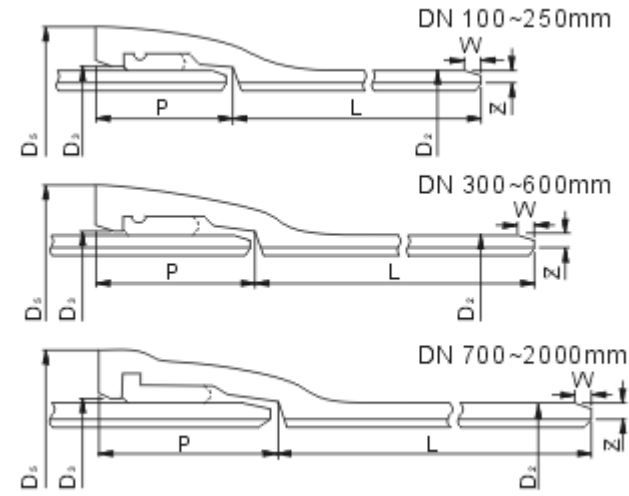


☉Type T Ductile Iron Pipe

SHIN NAN CASTING FACTORY CO., LTD.

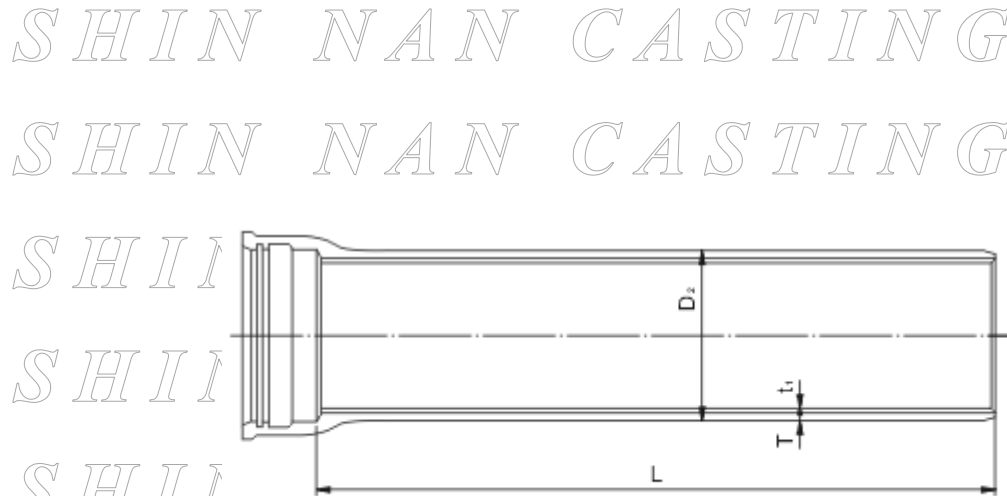

■接合部詳細図 Detail drawing

SHIN NAN CASTING FACTORY CO., LTD. Unit : mm

DN	Thickness								Lining Thickness t _l	O.D. D ₂	Dimensions					Effective Length L	Bell	Weight (kg)								DN	
	T										D ₃	D ₅	P	W	Z			Total Weight									
	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5										D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5		
100	7.5	-	-	-	6.0	-	-	-	3.5	118.0	120.8	174	87.0	9.5	3.2	4000	5.11	79.6	-	-	-	65.4	-	-	-	-	100
																5000		98.2	-	-	-	80.6	-	-	-	-	
																6000		116.8	-	-	-	95.7	-	-	-	-	
150	7.5	-	-	-	6.0	-	-	-	3.5	169.0	171.8	228	88.0	9.5	3.2	5000	7.63	144.0	-	-	-	117.0	-	-	-	-	150
																6000		170.9	-	-	-	139.5	-	-	-	-	
200	7.5	-	-	-	6.0	-	-	-	3.5	220.0	223.0	282	105.0	9.5	3.2	5000	11.5	190.0	-	-	-	156.0	-	-	-	-	200
																6000		226.3	-	-	-	184.5	-	-	-	-	
250	7.5	-	-	-	6.0	-	-	-	3.5	271.6	274.6	334	114.0	9.5	3.2	5000	15.0	237.0	-	-	-	194.0	-	-	-	-	250
																6000		281.9	-	-	-	229.8	-	-	-	-	

Unit : mm

DN	Thickness								Lining Thickness	O.D.	Dimensions						Effective Length	Weight (kg)								DN
	T										D ₂	D ₃	D ₅	P	W	Z		L	Bell	Total Weight						
	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5	t _l	D ₂							D ₃			D ₅	P	W	Z	L	Bell	
300	7.5	-	-	-	6.5	-	-	-	3.5	322.8	325.8	386	115.0	9.5	3.2	6000	17.3	336.0	-	-	-	294.0	-	-	-	300
350	7.5	-	-	-	6.5	-	-	-	5.0	374.0	377.6	450	130.0	14.0	5.0	6000	24.4	395.0	-	-	-	346.0	-	-	-	350
400	8.5	-	7.5	-	7.0	-	-	-	5.0	425.6	429.2	502	130.0	14.0	5.0	6000	27.6	505.0	-	450	-	423.0	-	-	-	400
450	9.0	-	8.0	-	7.5	-	-	-	5.0	476.8	480.4	555	130.0	14.0	5.0	6000	32.8	600.0	-	538	-	507.0	-	-	-	450
500	9.5	-	8.5	-	8.0	-	-	-	5.0	528.0	531.6	608	135.0	14.0	5.0	6000	37.9	702.0	-	633	-	599.0	-	-	-	500
600	11.0	-	10.0	-	9.0	-	8.5	-	5.0	630.8	634.4	713	140.0	14.0	5.0	6000	49.1	968.0	-	886	-	803.0	-	762	-	600
700	12.0	-	11.0	-	10.0	-	9.0	-	6.0	733.0	737.0	826	155.0	15.0	6.0	6000	69.6	1240.0	-	1140	-	1040.0	-	948	-	700
800	13.5	-	12.0	-	11.0	-	10.0	-	6.0	836.0	840.0	931	160.0	15.0	6.0	6000	85.4	1580.0	-	1420	-	1310.0	-	1200	-	800
900	15.0	-	13.0	-	12.0	-	11.0	-	6.0	939.0	943.0	1036	175.0	15.0	6.0	6000	108.0	1980.0	-	1730	-	1610.0	-	1480	-	900
1000	16.5	-	14.5	-	13.0	-	12.0	-	6.0	1041.0	1045.0	1148	185.0	19.0	7.5	6000	135.0	2410.0	-	2140	-	1940.0	-	1800	-	1000
1100	18.0	-	15.5	-	14.0	-	13.0	-	6.0	1144.0	1148.0	1253	200.0	19.0	7.5	6000	164.0	2900.0	-	2520	-	2300.0	-	2150	-	1100
1200	19.5	-	17.0	-	15.0	-	13.5	-	6.0	1246.0	1250.0	1357	215.0	19.0	7.5	6000	196.0	3420.0	-	3010	-	2680.0	-	2440	-	1200
1350	21.5	-	18.5	-	16.5	-	15.0	-	9.0	1400.0	1404.0	1523	235.0	23.0	8.5	6000	265.0	4260.0	-	3710	-	3340.0	-	3060	-	1350
1500	23.5	-	20.5	-	18.0	-	16.5	-	9.0	1554.0	1558.0	1685	260.0	23.0	8.5	6000	343.0	5190.0	-	4580	-	4070.0	-	3670	-	1500
1600	25.0	23.5	22.0	20.5	19.0	18.0	17.5	16.0	9.0	1650.0	1654.0	1783	275.0	23.0	8.5	4000	396.0	4050.0	3830	3610	3400	3180.0	3040	2960	2750	1600
1650	25.5	24.0	22.5	21.0	19.5	18.5	18.0	16.5	9.0	1701.0	1705.0	1836	280.0	23.0	8.5	4000	428.0	4270.0	4040	3820	3600	3370.0	3220	3150	2930	1650
																5000	496.0	4690	4420	4150	3880.0	3700	3600	3330		
1800	28.0	26.0	24.0	22.5	21.0	20.0	19.5	18.0	9.0	1848.0	1852.0	1991	305.0	26.0	9.5	4000	534.0	5110.0	4790	4470	4220	3980.0	3820	3740	3490	1800
																5000	626.0	5850	5450	5150	4840.0	4640	4540	4230		
2000	30.5	28.5	26.5	25.0	23.5	22.0	21.0	19.5	9.0	2061.0	2065.0	2214	335.0	26.0	9.5	4000	708.0	6270.0	5910	5550	5280	5010.0	4740	4560	4290	2000
																5000	766.0	7210	6760	6420	6090.0	5750	5520	5180		

- Note: 1. The weights of the bells is rounded off to effective figures, therefore the total sums of the above values are not always equal to the total weights.
 2. For pipe length other than the figure in table, please consult us.
 3. The lining thickness is the cement mortar lining.