



○Type T Jacking Method Ductile Iron Pipe

SHIN NAN CASTING FACTORY CO., LTD.


SHII

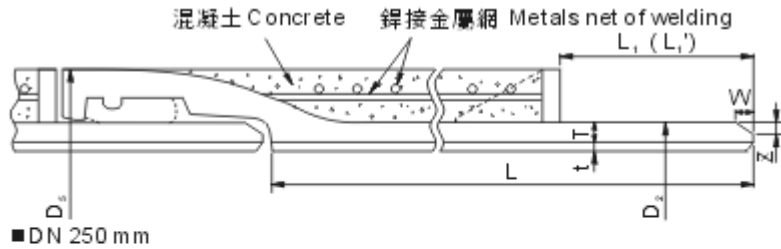


SHII

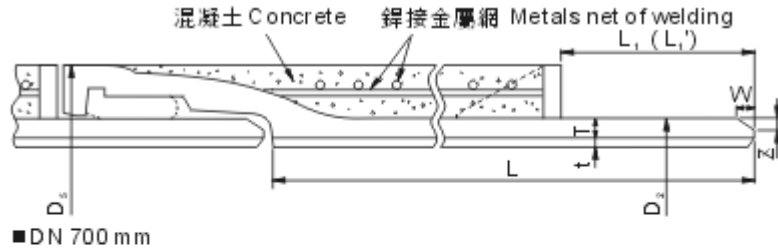


SHII

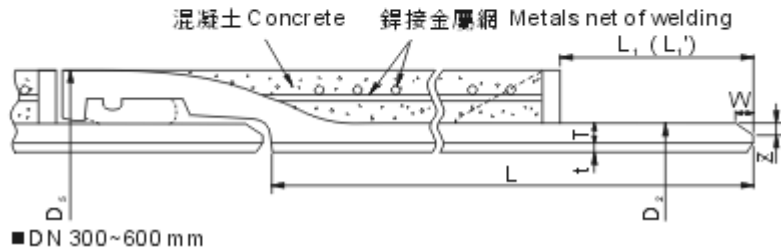

SHII



SHII



SHIN NAN CASTING FACTORY CO., LTD. Unit: mm

DN	Thickness									Lining Thickness t	Effective Length L1	Dimensions								DN	
	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5	D5			D2	D5	L1	M	N	K	L1'	W		Z
250	7.5	-	-	-	6.0	-	-	-	-	3.5	5000	271.6	334	109	14	70	14	250	9.5	3.2	250
300	7.5	-	-	-	6.5	-	-	-	-	3.5	6000	322.8	386	110	14	70	14	300	9.5	3.2	300
350	7.5	-	-	-	6.5	-	-	-	-	5.0	6000	374.0	450	125	16	80	16	300	14.0	5.0	350
400	8.5	-	7.5	-	7.0	-	-	-	-	5.0	6000	425.6	502	125	16	80	16	300	14.0	5.0	400
450	9.0	-	8.0	-	7.5	-	-	-	-	5.0	6000	476.8	555	125	16	80	16	300	14.0	5.0	450
500	9.5	-	8.5	-	8.0	-	-	-	-	5.0	6000	528.0	608	130	16	90	16	300	14.0	5.0	500
600	11.0	-	10.0	-	9.0	-	8.5	-	7.5	5.0	6000	630.8	713	135	16	90	16	330	14.0	5.0	600
700	12.0	-	11.0	-	10.0	-	9.0	-	8.0	6.0	6000	733.0	826	150	19	140	19	360	15.0	6.0	700

Note: L1' is the size of ahead pipe.

SHIN NAN CASTING FACTORY CO., LTD.