


☛ Type U Ductile Iron Pipe

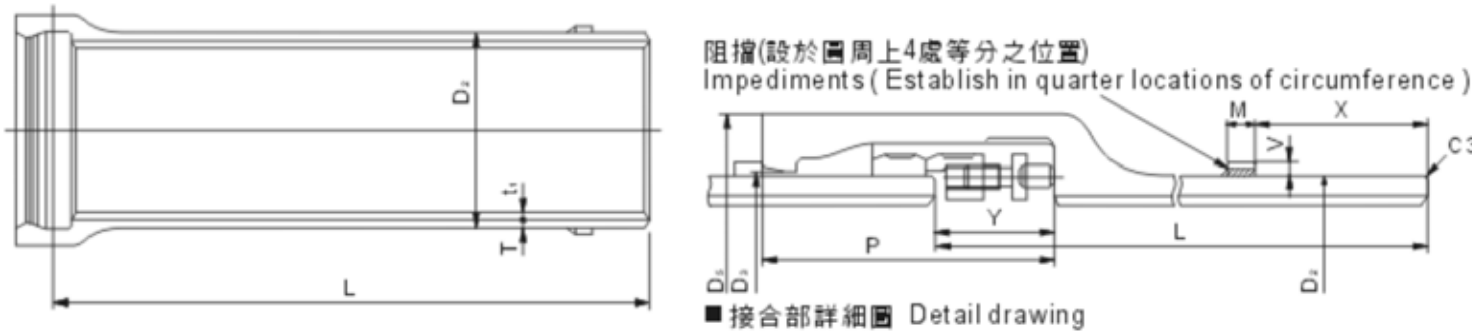

DN	Thickness								Lining t ₁	Dimensions								Effectives L	Weight (kg)								DN		
	T									D ₂	D ₃	D ₅	P	Y	M	V	X		Bell	Block	Total Weight								
	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5													D1	D1.5	D2	D2.5	D3	D3.5		D4	D4.5
700	12.0	-	11.0	-	10.0	-	9.0	-	6	733	738	831	265	105	25	16	160	6000	161	0.942	1310	-	1210	-	1120	-	1020	-	700
800	13.5	-	12.0	-	11.0	-	10.0	-	6	836	841	938	265	105	25	16	160	6000	197	0.942	1670	-	1510	-	1400	-	1290	-	800
900	15.0	-	13.0	-	12.0	-	11.0	-	6	939	944	1043	265	105	25	16	160	6000	231	0.942	2070	-	1830	-	1700	-	1580	-	900
1000	16.5	-	14.5	-	13.0	-	12.0	-	6	1041	1047	1151	270	105	25	16	165	6000	276	0.942	2520	-	2250	-	2050	-	1910	-	1000
1100	18.0	-	15.5	-	14.0	-	13.0	-	6	1144	1150	1258	270	105	25	16	165	6000	324	0.942	3010	-	2640	-	2420	-	2270	-	1100
1200	19.5	-	17.0	-	15.0	-	13.5	-	6	1246	1252	1362	270	105	25	16	165	6000	365	0.942	3530	-	3130	-	2810	-	2570	-	1200
1350	21.5	-	18.5	-	16.5	-	15.0	-	9	1400	1406	1521	280	105	25	16	175	6000	451	0.942	4380	-	3840	-	3470	-	3200	-	1350
1500	23.5	-	20.5	-	18.0	-	16.5	-	9	1554	1560	1679	285	105	25	16	180	6000	541	0.942	5300	-	4700	-	4200	-	3900	-	1500
1600	25.0	23.5	22.0	20.5	19.0	18.0	17.5	16.0	9	1650	1656	1786	295	115	25	16	180	4000	640	0.942	4190	3980	3770	3560	3350	3200	3130	2920	1600
1650	25.5	24.0	22.5	21.0	19.5	18.5	18.0	16.5	9	1701	1707	1839	295	115	25	16	180	5000	678	0.942	5100	4840	4570	4310	4040	3860	3780	3510	1650
																		4000	678	0.942	4410	4190	3970	3760	3540	3400	3320	3100	
1800	28.0	26.0	24.0	22.5	21.0	20.0	19.5	18.0	9	1848	1854	1990	295	115	25	16	180	5000	779	0.942	5370	5100	4820	4550	4280	4090	4000	3730	1800
																		4000	779	0.942	5230	4910	4600	4360	4130	3970	3890	3650	
2000	30.5	28.5	26.5	25.0	23.5	22.0	21.0	19.5	9	2061	2067	2209	300	115	25	16	185	5000	951	0.942	6370	5980	5580	5290	4990	4790	4690	4390	2000
																		4000	951	0.942	6360	6010	5660	5390	5130	4870	4690	4430	
																		5000			7750	7310	6870	6540	6210	5870	5650	5320	

Unit : mm

Note: 1. The weights of the bells is rounded off to effective figures, therefore the total sums of the above values are not always equal to the total weights.

2. The shape of the bells shall be in accordance with the shape of the dotted line.

3. For pipe length other than the figure in table, please consult us.

4. The lining thickness is the cement mortar lining.