





**●Type U Center Gland for Collar**

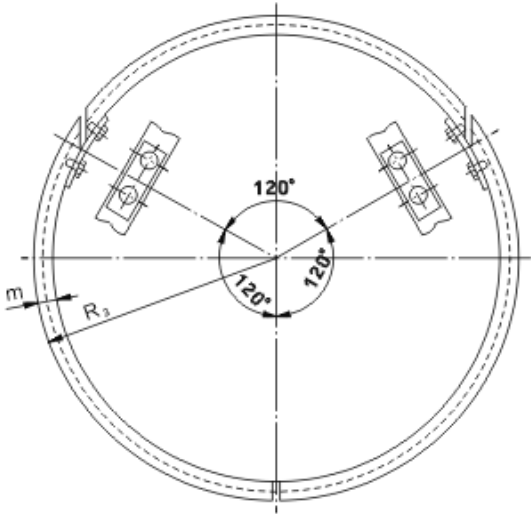


■ U型套管用中間圈 Center Gland for Collar

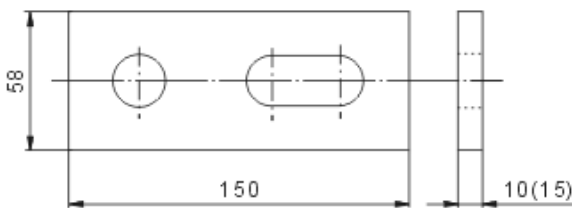

■ 中間圈用卡具 Plate for Center Gland  
(CNS 2473之SS 400或尼龍6)  
(SS 400 or nylon 6 of CNS 2473)

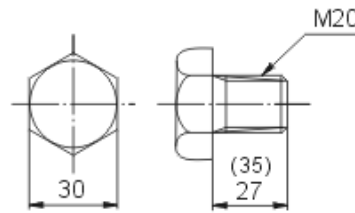

■ 中間圈用卡具用螺栓 Bolts for Plate  
(CNS 2473之SS400或 CNS 3270之304)  
(SS 400 of CNS 2473 or 304 of CNS 3270)

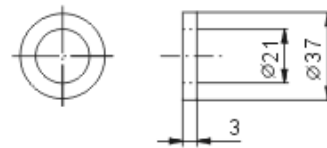

■ 中間圈用卡具用墊圈 Gasket for Plate  
(CNS 3270之304)

Unit : mm

| DN   | Dimensions     |    |    |    | Weight (kg) |
|------|----------------|----|----|----|-------------|
|      | R <sub>3</sub> | i  | m  | n  |             |
| 700  | 389.5          | 22 | 40 | 60 | 32.3        |
| 800  | 441.0          | 22 | 40 | 60 | 36.9        |
| 900  | 492.5          | 22 | 40 | 60 | 41.4        |
| 1000 | 543.5          | 22 | 40 | 60 | 45.9        |
| 1100 | 595.0          | 22 | 40 | 60 | 50.4        |
| 1200 | 646.0          | 22 | 40 | 60 | 54.9        |
| 1350 | 723.0          | 22 | 40 | 60 | 61.7        |
| 1500 | 800.0          | 22 | 40 | 60 | 68.5        |
| 1600 | 851.0          | 22 | 40 | 60 | 73.0        |
| 1650 | 876.5          | 22 | 40 | 60 | 75.2        |
| 1800 | 950.0          | 22 | 40 | 60 | 81.7        |
| 2000 | 1056.5         | 22 | 40 | 60 | 91.1        |

Tolerance Unit : mm

| DN       | Tolerance      |           |              |      | DN       |
|----------|----------------|-----------|--------------|------|----------|
|          | R <sub>3</sub> | i         | m            | n    |          |
| 700 2000 | ±3.0           | +2.0<br>0 | +3.0<br>-2.0 | ±1.0 | 700 2000 |