





●Type U Tee for Sluice Valves

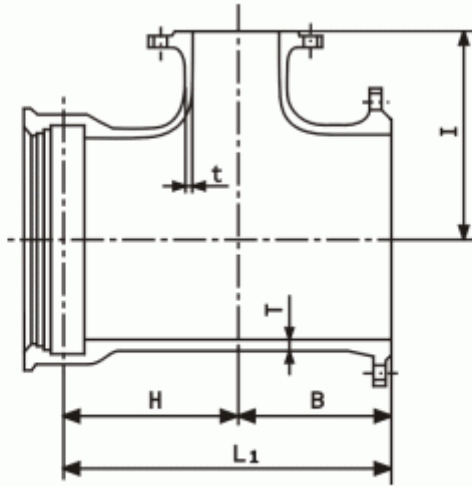

■ A1

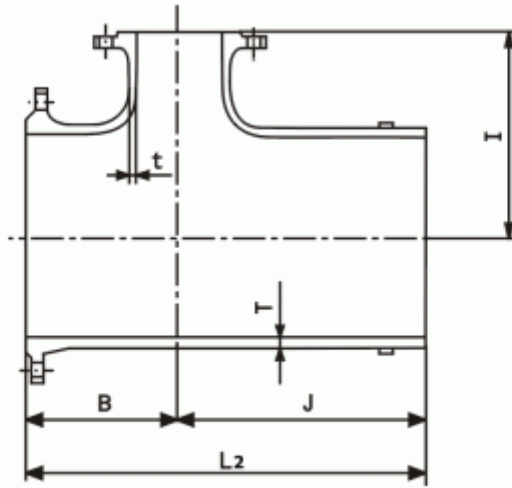

■ A2

Unit: mm

Nominal size		Thickness		Dimensions						Weight (kg)							
D	d	T	t	B	I	H	J	L ₁	L ₂	A1				A2			
										7.5 K	10 K	16 K	20 K	7.5 K	10 K	16 K	20 K
700	150	17.0	12	310	490	415	620	725	930	374	375.6	423.8	469.8	315	316.6	364.8	410.8
800	150	18.0	13	330	550	435	630	765	960	473	474.0	540.4	622.6	395	396.0	462.4	544.6
900	200	19.0	14	370	610	475	670	845	1040	595	588.7	667.5	768.8	508	501.7	580.5	681.8
1000	200	20.0	15	400	670	505	700	905	1100	722	719.7	829.8	-	621	618.7	728.8	-
1100	200	21.0	16	420	730	525	720	945	1140	862	862.7	980.8	-	741	741.7	859.8	-
1200	250	22.0	17	460	790	565	750	1025	1210	1030	1041.2	1182.0	-	894	905.2	1046.0	-
1350	250	24.0	19	490	870	595	760	1085	1250	1320	1332.2	1513.0	-	1130	1142.2	1323.0	-
1500	300	26.0	21	530	960	635	790	1165	1320	1650	1670.2	1890.0	-	1420	1440.2	1660.5	-
1600	300	27.5	21	540	1010	655	880	1195	1420	1930	1947.2	-	-	1730	1747.0	-	-
1650	300	28.0	21	540	1030	655	890	1195	1430	2030	2049.2	-	-	1820	1839.2	-	-
1800	350	30.0	21	580	1120	695	930	1275	1510	2430	2464.6	-	-	2200	2234.6	-	-
2000	350	32.0	21	590	1220	705	940	1295	1530	2920	2975.6	-	-	2620	2675.6	-	-
2100	400	33.0	21	620	1280	735	970	1355	1590	3250	3322.6	-	-	2930	3002.6	-	-
2200	400	34.0	21	630	1350	745	980	1375	1610	3550	3617.6	-	-	3220	3287.6	-	-
2400	450	36.0	21	670	1430	785	1020	1455	1690	4320	4429.4	-	-	3880	3989.4	-	-
2600	500	37.5	21	710	1550	840	850	1550	1560	5350	5480.3	-	-	4060	4190.3	-	-