





●Type U Gland

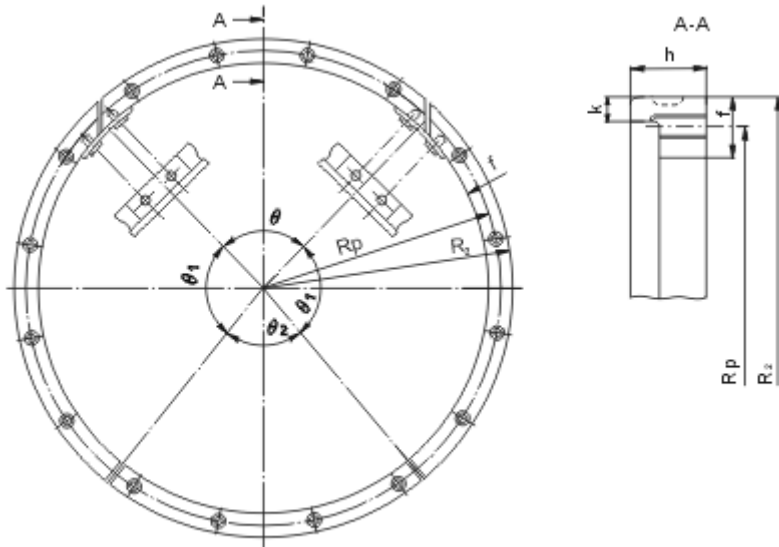

■ 壓圈 Gland

Unit : mm

DN	Gland Dimensions								A Set of Weight (kg)
	R ₂	f	h	k	1 (Degree)	2 (Degree)	R _p		
700	389.5	42	55	17	80	104	72	368.5	28.9
800	441.0	42	55	17	90	96	78	420.0	32.9
900	492.5	42	55	17	90	96	78	471.5	37.0
1000	543.5	42	55	17	90	96	78	522.5	41.2
1100	595.0	42	55	17	90	96	78	574.0	45.0
1200	646.0	42	55	17	98	98	66	625.0	49.0
1350	723.0	42	55	17	98	98	66	702.0	55.2
1500	800.0	42	55	17	98	98	66	779.0	61.4
1600	852.0	50	60	20	96	96	72	825.0	86.2
1650	877.5	50	60	20	96	96	72	850.5	89.0
1800	951.0	50	60	20	90	102	66	924.0	96.7
2000	1057.5	50	60	20	96	96	72	1030.5	108.0

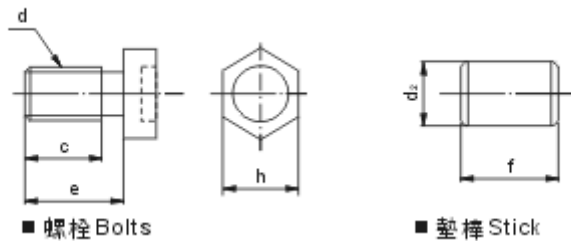

■ 螺栓 Bolts

■ 墊棒 Stick


Unit : mm

DN	Bolts Nom.	Bolts & Stick Dimensions					A Set of Weight
		d	c	e	h	f	
700	M22	30	40	32	20	30	14
800	M22	30	40	32	20	30	16
900	M22	30	40	32	20	30	16
1000	M22	30	40	32	20	30	16
1100	M22	30	40	32	20	30	20
1200	M22	30	40	32	20	30	22
1350	M22	30	40	32	20	30	22
1500	M22	30	40	32	20	30	22
1600	M24	35	45	36	25	35	26
1650	M24	35	45	36	25	35	26
1800	M24	35	45	36	25	35	28
2000	M24	35	45	36	25	35	30



SHIN NAI

CO., LTD.

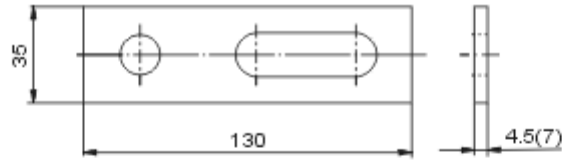


■ 卡具 Plate
(CNS 2473之SS400或尼龍6)
(SS 400 or nylon 6 of CNS 2473)

CO., LTD.

SHIN NAI

SHIN NAI

CO., LTD.

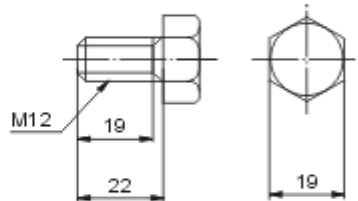

■ 卡具用螺栓 Bolts for Plate
(CNS 2473之SS400或 CNS 3270之304)
(SS 400 of CNS 2473 or 304 of CNS 3270)

CO., LTD.

SHIN NAI

SHIN NAI

CO., LTD.



■ 卡具用墊圈 Gasket for Plate
(CNS 3270之304)

CO., LTD.

SHIN NAN CASTING FACTORY CO., LTD.

Tolerance

Unit : mm

DN	Tolerance							
	Gland				Bolts & Stick			
	R ₂	f	h	k	e	h	d ₂	f
700 2000	+1.0 -2.5	±2.0	±1.5	+4.0 -3.0	±0.5	0 -1.0	0 -0.1	+1.0 -0.5

SHIN NAN CASTING FACTORY CO., LTD.

SHIN NAN CASTING FACTORY CO., LTD.

SHIN NAN CASTING FACTORY CO., LTD.

SHIN NAN CASTING FACTORY CO., LTD.

SHIN NAN CASTING FACTORY CO., LTD.

SHIN NAN CASTING FACTORY CO., LTD.